

MERIDIAN 2.0 - 2.1 - 2.2

REGISTERED MODELS



MERIDIAN 2.2



MERIDIAN 2.1



MERIDIAN 2.0



Always consult www.augentilighting.it for
UPDATED TECHNICAL DATA



MERIDIAN 2.0 - 2.1 - 2.2

WALL



APPLICATION



Double emission fixture with diffused distribution of the light beam. Screen in printed etched glass and main structure in die-cast aluminum. Double mains voltage LED circuit for maximizing output. Possibility of power supply with driver. Dali dimmable on request with extra charge.

WALL

MERIDIAN 2.0 - 2.1 - 2.2

SPECIFICATIONS




- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver



LED SYSTEM WITH BUILT-IN DRIVER

REVIEW


COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
4570W/WR50VS	1982 lm	1050 lm	3000 K	80	14W - 220-240Vac 50/60Hz	I
4570W/NR50VS	2076 lm	1100 lm	4000 K	80	14W - 220-240Vac 50/60Hz	I




LED SYSTEM WITH BUILT-IN DRIVER

REVIEW


COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
4571W/WR50VS	1982 lm	1084 lm	3000 K	80	14W - 220-240Vac 50/60Hz	I
4571W/NR50VS	2076 lm	1136 lm	4000 K	80	14W - 220-240Vac 50/60Hz	I




DIMENSIONS



MERIDIAN 2.0
4570W



MERIDIAN 2.1
4571W




MERIDIAN 2..2
4572W



LED SYSTEM WITH BUILT-IN DRIVER

REVIEW

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
4572W/WR50VS	1982 lm	1097 lm	3000 K	80	14W - 220-240Vac 50/60Hz	I
4572W/NR50VS	2076 lm	1149 lm	4000 K	80	14W - 220-240Vac 50/60Hz	I



STANDARD COLOURS





WALL
MERIDIAN
2.0 - 2.1 - 2.2





MERIDIAN 2.0 - 2.1 - 2.2


PHOTOMETRICS DATA MERIDIAN 2.0

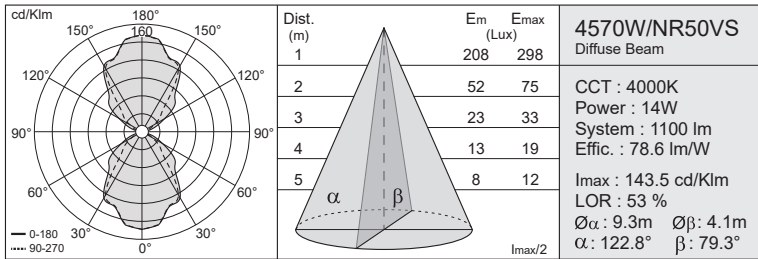


PHOTOMETRICS DATA MERIDIAN 2.1

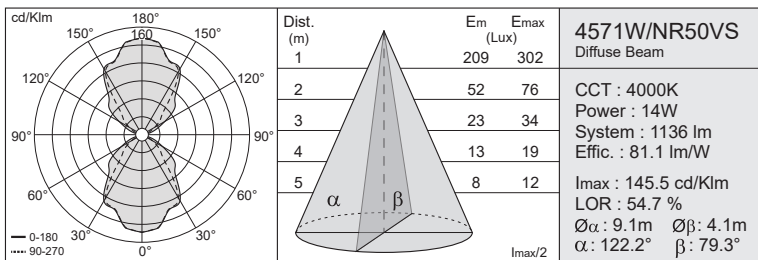


PHOTOMETRICS DATA MERIDIAN 2.2

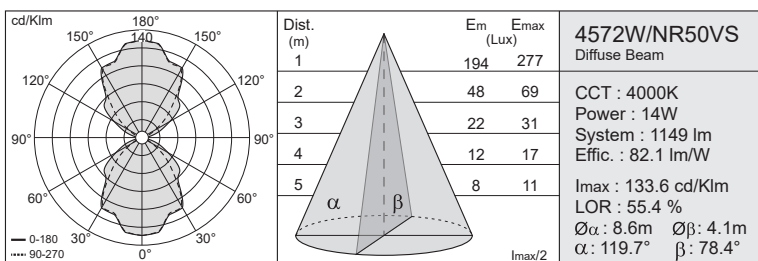


ASSEMBLY



MERIDIAN 2.0
4570W



MERIDIAN 2.1
4571W



MERIDIAN 2.2
4572W

CHARACTERISTICS

- Independent optical system housing not accessible during installation, with wall-mounting plate.
- Mounting system body/plate obtained through integrated hinge and locking screw.
- Central or Lateral power cable input. Internal 3-ways terminal block for non feed-through wiring.
- Power cable allowed up to 1.5mm² three-pole with external sheath max. 11mm.
- LED maintenance by opening the optical compartment.
- Driver maintenance (if present) with direct access independent of optical system housing.
- Version available with LED DIRECT AC system at mains voltage, or with built-in driver, with the possibility of Dali dimming
- Luminaire Conforms to EN60598-1 Standard and special requirements

MATERIALS

- Fixture/Base in Die-Cast Aluminium Alloy
- Borosilicate glass with internal acid-etched finish with transmission LT>60%.
- Seals in EDPM closed cell rubber, UV- resist. Tx -40/+150°C .
- Passive heat sink integrated into structure.
- Internal and external screws in A2 Stainless Steel
- IP66 Megol resin cable gland UV-Resist. GWT850°C
- Polyester powder coating, UV-stabilised with anti-corrosion treatment.