

MODO 601W1



MODO 602W1



MODO 603W1



MODO WALL

LINKED PRODUCTS



MODO SUSPENSION
Pag. 106




MODO FLOODLIGHT
Pag. 130




MODO SMALL POLE
Pag. 288



Always consult www.augentilighting.it for
UPDATED TECHNICAL DATA

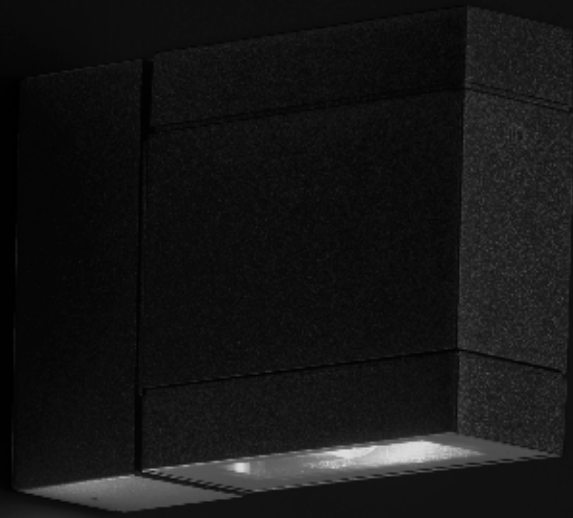

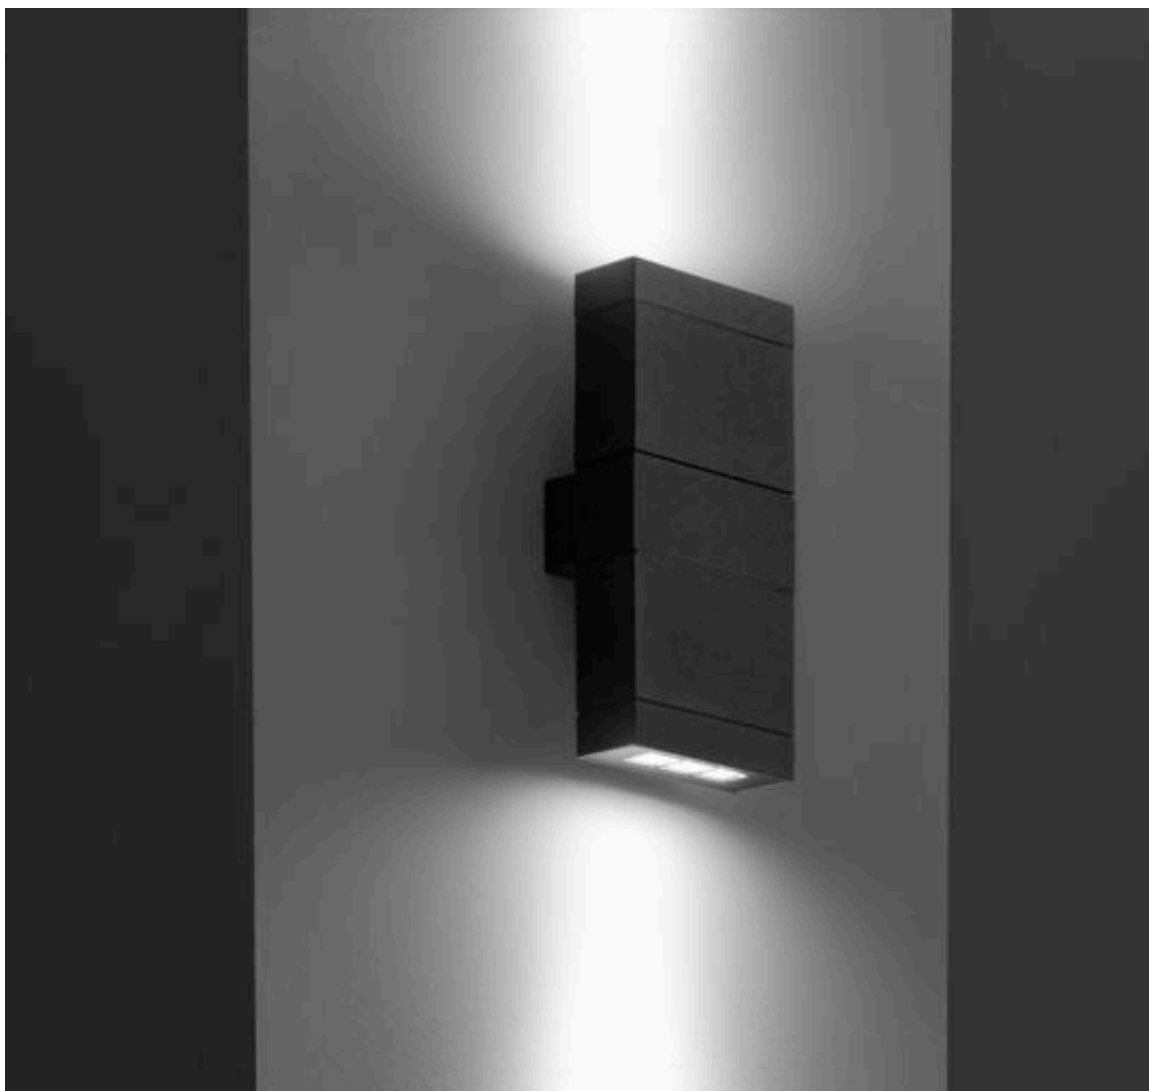

APPLICATION



 NEW DIGITAL
MODO BROCHURE



A simple parallelepiped, with a minimal line and compact dimensions, capable of being wallwashers, vertically or horizontally, oriented according to the light requirements. It also offers the possibility of combining it in a modular system, which can be combined in both planar directions, to form a different product with infinite capabilities. A system, therefore, more than a single volume, capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer. Dali dimmable on request with extra charge.

CHARACTERISTICS

- Optical/Driver section not accessible during installation.
- LED maintenance can be carried out by opening the optical compartment. LED module by Augenti
- Driver maintenance can be performed by opening the main body.
- Rear cable entry (cable supplied with Floodlight version)
- Luminaire Conforms to EN60598-1 Standard and special requirements

MATERIALS

- Extra Clear Tempered Glass 4mm with silk-screen printing.
- Body in Extruded Aluminium Alloy
- Caps in Die-cast Aluminium
- Heatsink integrated into fixture in Die-cast Aluminium
- Gaskets in EPDM Rubber Tmax 120°C UV resistant
- Brackets (Internal/External) in AISI430F Stainless Steel polyester powder painted
- Internal and external screws in A2 Stainless Steel
- Polyester powder paint finish resistant to corrosion and sea mist (ISO7523)

WALL

MODO WALL

SPECIFICATIONS



LED SYSTEM WITH BUILT-IN DRIVER - Single Emission

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
601W1/WP70XX	790 lm	662 lm	3000K	80	8W - 220-240Vac 50/60Hz	I	3
601W1/NP70XX	900 lm	741 lm	4000K	80	8W - 220-240Vac 50/60Hz	I	3

Beam XX :
 XX=NB (Flood 12°)
 XX=MB (Flood 28°)
 XX=WB (Wide Flood 50°)
 XX=AB (Asymmetric)


Single Emission
 Silk-Screen Clear Glass

Dali dimmable on request
 with extra charge

- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- Single Emission version can be oriented both upwards and downwards



DIMENSIONS



601W1


LED SYSTEM WITH BUILT-IN DRIVER - Double Emission

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
602W1/WP70XX	1580 lm	1324 lm	3000K	80	16W - 220-240Vac 50/60Hz	I	6
602W1/NP70XX	1800 lm	1482 lm	4000K	80	16W - 220-240Vac 50/60Hz	I	6


Beam XX :
 XX=NB (Flood 12°)
 XX=MB (Flood 28°)
 XX=WB (Wide Flood 50°)
 XX=AB (Asymmetric)
 XX=NW (Double Flood 12°+50°)

Double Emission
 Silk-Screen Clear Glass

Dali dimmable on request
 with extra charge



602W1



603W1

LED SYSTEM WITH BUILT-IN DRIVER - Single Emission

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
603W1/WP70AB	790 lm	660 lm	3000K	80	8W - 220-240Vac 50/60Hz	I	3
603W1/NP70AB	900 lm	739 lm	4000K	80	8W - 220-240Vac 50/60Hz	I	3
603W1/WP70BB	260 lm	237 lm	3000K	80	3.5W - 220-240Vac 50/60Hz	I	1
603W1/NP70BB	300 lm	278 lm	4000K	80	3.5W - 220-240Vac 50/60Hz	I	1

Beam
 AB (Asymmetric)
 BB (Straight Blade 4°)

Single Emission
 Silk-Screen Clear Glass

Dali dimmable on request
 with extra charge

STANDARD COLOURS



