


TECNO

TECNO



Always consult www.augentighting.it for
UPDATED TECHNICAL DATA



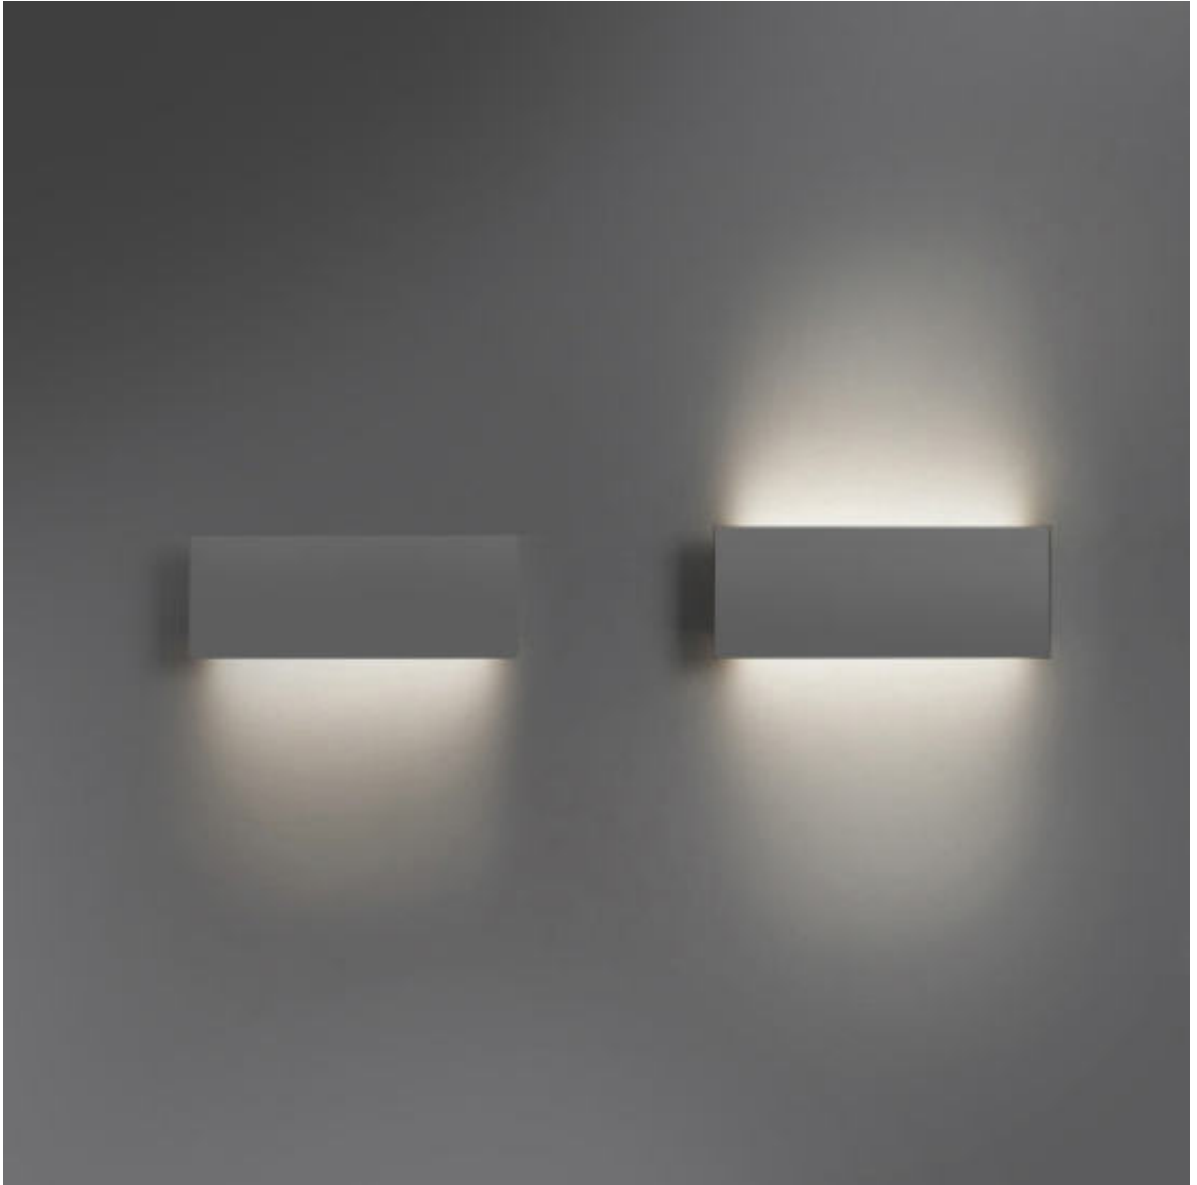

APPLICATION



Strengthened by its resistance, Tecno is a product characterized by a high quality of construction materials which guarantees its use outdoors. We offer Tecno in two different versions: in the first the article presents an exclusive downward orientation of the light, in the second, however, the article presents an orientation of the light in both directions, therefore both downwards and upwards. . There is the possibility to choose Tecno in five color variants, in order to better adapt to your setting needs. The LED system guarantees its luminous efficiency and allows for minimum energy consumption. Installable by wall fixing, Tecno is a perfect combination of design and technical efficiency.

WALL

TECNO


SPECIFICATIONS



- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value


LED DIRECT AC SYSTEM - Single Emission

COD.	Source Flux	Fixture Flux	CCT	CRI	POWER	CL
309-...LD3	1200 lm	270 lm	3000 K	80	12W - 220-240Vac 50/60Hz	I
309-...LD4	1250 lm	285 lm	4000 K	80	12W - 220-240Vac 50/60Hz	I




LED DIRECT AC SYSTEM - Double Emission


COD.	Source Flux	Fixture Flux	CCT	CRI	POWER	CL
209-...LD3	1200 lm	540 lm	3000 K	80	12W - 220-240Vac 50/60Hz	I
209-...LD4	1250 lm	570 lm	4000 K	80	12W - 220-240Vac 50/60Hz	I



DIMENSIONS



ASSEMBLY



CHARACTERISTICS

- Optical system housing accessible during installation, with LED on wall-mounted anchor plate.
- Mounting system body/plate obtained through integrated hinge and locking screw.
- Lateral power cable entry with internal 3-way terminal block for non feed-through wiring.
- Power cable allowed up to 1.5mmq tripolar with external sheath max 10mm.
- LED maintenance by opening the optical compartment.
- Luminaire Conforms to EN60598-1 Standard and special requirements

MATERIALS

- Body: Die-Cast Aluminium Alloy
- Base: Polyamide (PA6) reinforced with Fiber 30% UV resistant GW960° C
- Borosilicate glass with internal acid-etched finish with transmission LT>60%.
- Glass gasket in neutral cross-linking silicone glue - Tx-50/+250°C UV resist.
- Integrated passive heat sink made of aluminium alloy
- Internal and external screws in A2 Stainless Steel
- IP65 Megol resin cable gland UV-Resist. GWT850°C
- Polyester powder coating, UV-stabilised with anti-corrosion treatment.

STANDARD COLOURS

