





MAXIMA



DETAIL REFLECTOR PT
Chromed steel louvres

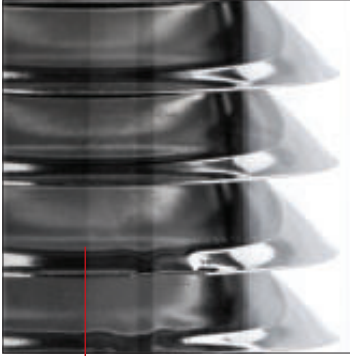

APPLICATION

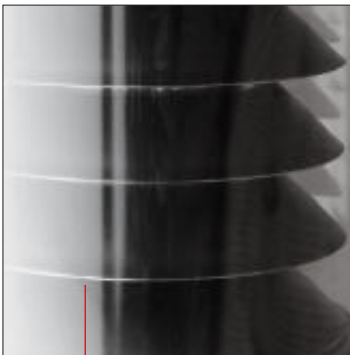

DETAIL REFLECTOR X3
Black painted ABS louvres with chromed steel edge detail

Maxima comes in two configurations: the first, suitable for residential installation, has a 370 mm lighting body and offers 4 different heights starting from 570 mm and reaching a maximum of 1600 mm. The second, also suitable for semi-urban and urban installation, has a 610 mm lighting body and heights that cover from 1200 mm to 3000 mm. Consisting of chromed louvre reflectors, in addition to guaranteeing a diffuse emission and limiting glare, it actively participates in designing the luminaire in its shape. It is also available with shielded louvres suitable for compliance with the Regulations on Light Pollution. The structure is equipped with a flange made with metal clamps necessary to guarantee its stability. The lamp body, firmly connected to the pole by means of a bayonet coupling, makes it easily removable during normal maintenance operations. Dali dimmable on request with extra charge.

CHARACTERISTICS

- Pole luminaire for asymmetrical light with downward flux > 85%
- Optical compartment not accessible during installation.
- Power cable entry with internal 3-way terminal block for non-pass-through wiring.
- Power cable allowed up to 1.5mm² three-pole with external sheath max. 11mm.
- LED system with built-in driver 220-240V/50-60Hz
- LED maintenance can be carried out by removing the rods of the optical compartment with removal of the screen
- Driver maintenance can be carried out by removing the pole head section.
- Luminaire Conforms to EN60598-1 Standard and special requirements

MATERIALS

- Fixture/Base in die-cast aluminum alloy.
- Pole: Aluminum alloy for extrusion.
- Diffuser in transparent polycarbonate (PC) UV Stab. GWT960
- ABS chromed louvre GWT750 UV Stab.
- Molded gaskets in UV resist. Tx -40/+180°C.
- Integrated passive heatsink in Aluminum extrusion.
- Internal and external screws in A2 Stainless Steel
- IP68 cable gland in PS for retaining the power supply cable.
- Polyester powder coating, UV-stabilised with anti-corrosion treatment.

SMALL POLES

MAXIMA 385F0

SPECIFICATIONS



- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- **Ground connection system with anchoring brackets to be ordered separately (KIT.005)**


REFLECTOR PT



REFLECTOR X3




DIMENSIONS

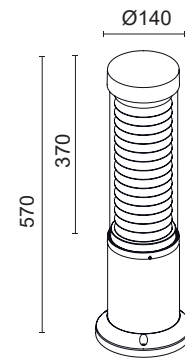


LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
385F0/WR8.PT	3964 lm	1605 lm	3000 K	80	26W- 220-240Vac 50/60Hz	I
385F0/NR8.PT	4152 lm	1675 lm	4000 K	80	26W- 220-240Vac 50/60Hz	I




LED SYSTEM WITH BUILT-IN DRIVER


COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
385F0/WR8.X3	3964 lm	750 lm	3000 K	80	26W- 220-240Vac 50/60Hz	I
385F0/NR8.X3	4152 lm	788 lm	4000 K	80	26W- 220-240Vac 50/60Hz	I




KIT.005 Ground connection system to be ordered separately



ACCESSORIES



MOR683P/2V
IP68 2ways/3poles connector.
Maximum section 3x2.5mm




MOR68Y3P/3V
IP68 3ways/3poles connector Y.
Maximum section 3x2.5mm


STANDARD COLOURS



LIGHT DIFFUSION

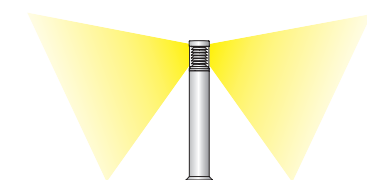

Maxima 385PT
Clear Polycarbonate with louvres

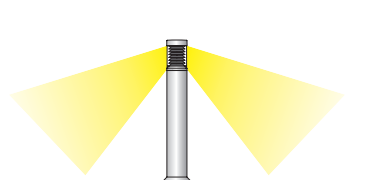

Maxima 385X3
Clear Polycarbonate with antipollution louvres


MAXIMA 385F1

SPECIFICATIONS




- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- **Ground connection system with anchoring brackets to be ordered separately (KIT.005)**

DIMENSIONS

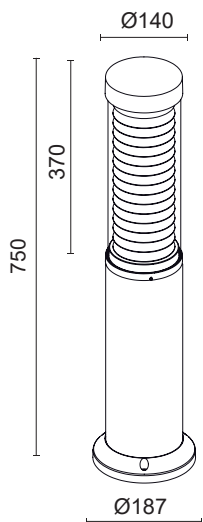

KIT.005 Ground connection system to be ordered separately

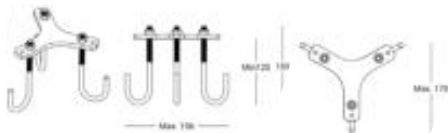

STANDARD COLOURS



REFLECTOR PT




REFLECTOR X3




LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
385F1/WR8.PT	3964 lm	1605 lm	3000 K	80	26W- 220-240Vac 50/60Hz	I
385F1/NR8.PT	4152 lm	1675 lm	4000 K	80	26W- 220-240Vac 50/60Hz	I




LED SYSTEM WITH BUILT-IN DRIVER


COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
385F1/WR8.X3	3964 lm	750 lm	3000 K	80	26W- 220-240Vac 50/60Hz	I
385F1/NR8.X3	4152 lm	788 lm	4000 K	80	26W- 220-240Vac 50/60Hz	I



ACCESSORIES



MOR683P/2V
IP68 2ways/3poles connector.
Maximum section 3x2.5mm



MOR68Y3P/3V
IP68 3ways/3poles connector Y.
Maximum section 3x2.5mm

LIGHT DIFFUSION



**REFLECTOR
PT**



**REFLECTOR
X3**



SMALL POLES


MAXIMA 385F2

SPECIFICATIONS




- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- **Ground connection system with anchoring brackets to be ordered separately (KIT.005)**

DIMENSIONS

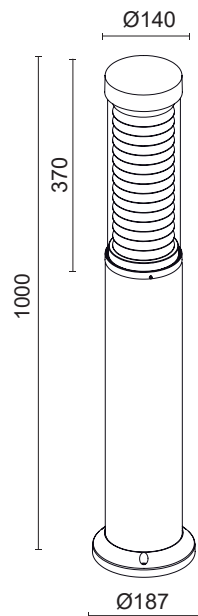


LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
385F2/WR8.PT	3964 lm	1605 lm	3000 K	80	26W- 220-240Vac 50/60Hz	I
385F2/NR8.PT	4152 lm	1675 lm	4000 K	80	26W- 220-240Vac 50/60Hz	I




LED SYSTEM WITH BUILT-IN DRIVER


COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
385F2/WR8.X3	3964 lm	750 lm	3000 K	80	26W- 220-240Vac 50/60Hz	I
385F2/NR8.X3	4152 lm	788 lm	4000 K	80	26W- 220-240Vac 50/60Hz	I




KIT.005 Ground connection system to be ordered separately

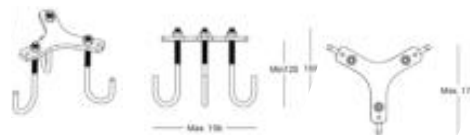

ACCESSORIES




MOR683P/2V
IP68 2ways/3poles connector.
Maximum section 3x2.5mm




MOR68Y3P/3V
IP68 3ways/3poles connector Y.
Maximum section 3x2.5mm

LIGHT DIFFUSION

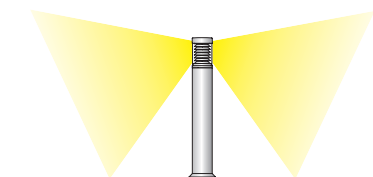

Maxima 385PT
Clear Polycarbonate with louvres



Maxima 385X3
Clear Polycarbonate with antipollution louvres

STANDARD COLOURS



SMALL POLES


MAXIMA 385F3

SPECIFICATIONS



- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- **Ground fixing system with plug INCLUDED**

DIMENSIONS

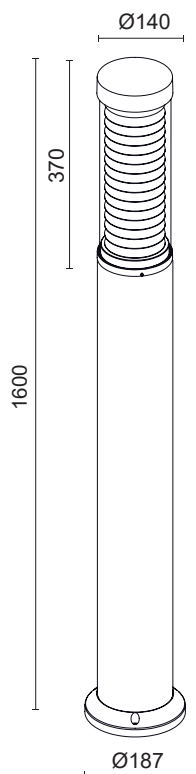

REFLECTOR PT




REFLECTOR X3




LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
385F3/WR8.PT	3964 lm	1605 lm	3000 K	80	26W- 220-240Vac 50/60Hz	I
385F3/NR8.PT	4152 lm	1675 lm	4000 K	80	26W- 220-240Vac 50/60Hz	I




LED SYSTEM WITH BUILT-IN DRIVER


COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
385F3/WR8.X3	3964 lm	750 lm	3000 K	80	26W- 220-240Vac 50/60Hz	I
385F3/NR8.X3	4152 lm	788 lm	4000 K	80	26W- 220-240Vac 50/60Hz	I



ACCESSORIES



MOR683P/2V
IP68 2ways/3poles connector.
Maximum section 3x2.5mm



MOR68Y3P/3V
IP68 3ways/3poles connector Y.
Maximum section 3x2.5mm

STANDARD COLOURS



LIGHT DIFFUSION

