

LUCY

SALINITY RESISTANT



LUCY

SALINITY RESISTANT



LUCY

SALINITY RESISTANT

The carefully chosen materials and the high corrosion protection make this product suitable for installation in saline environments.

The steel outer ring is resistant to corrosion and recyclable, while the polycarbonate of the recessed body remains unaltered even in the face of high temperatures and aggressive atmospheric agents.

The absence of iron components, which oxidizing degrades the steel, determines a high longevity of the appliance in unfavorable environmental conditions such as coastal areas with high salinity.

LINKED PRODUCTS



LUCY WALL
Pag. 96



LUCY GROUND RECESSED
Pag. 256




Always consult www.augentilighting.it
for UPDATED TECHNICAL DATA



WALL RECESSED

LUCY

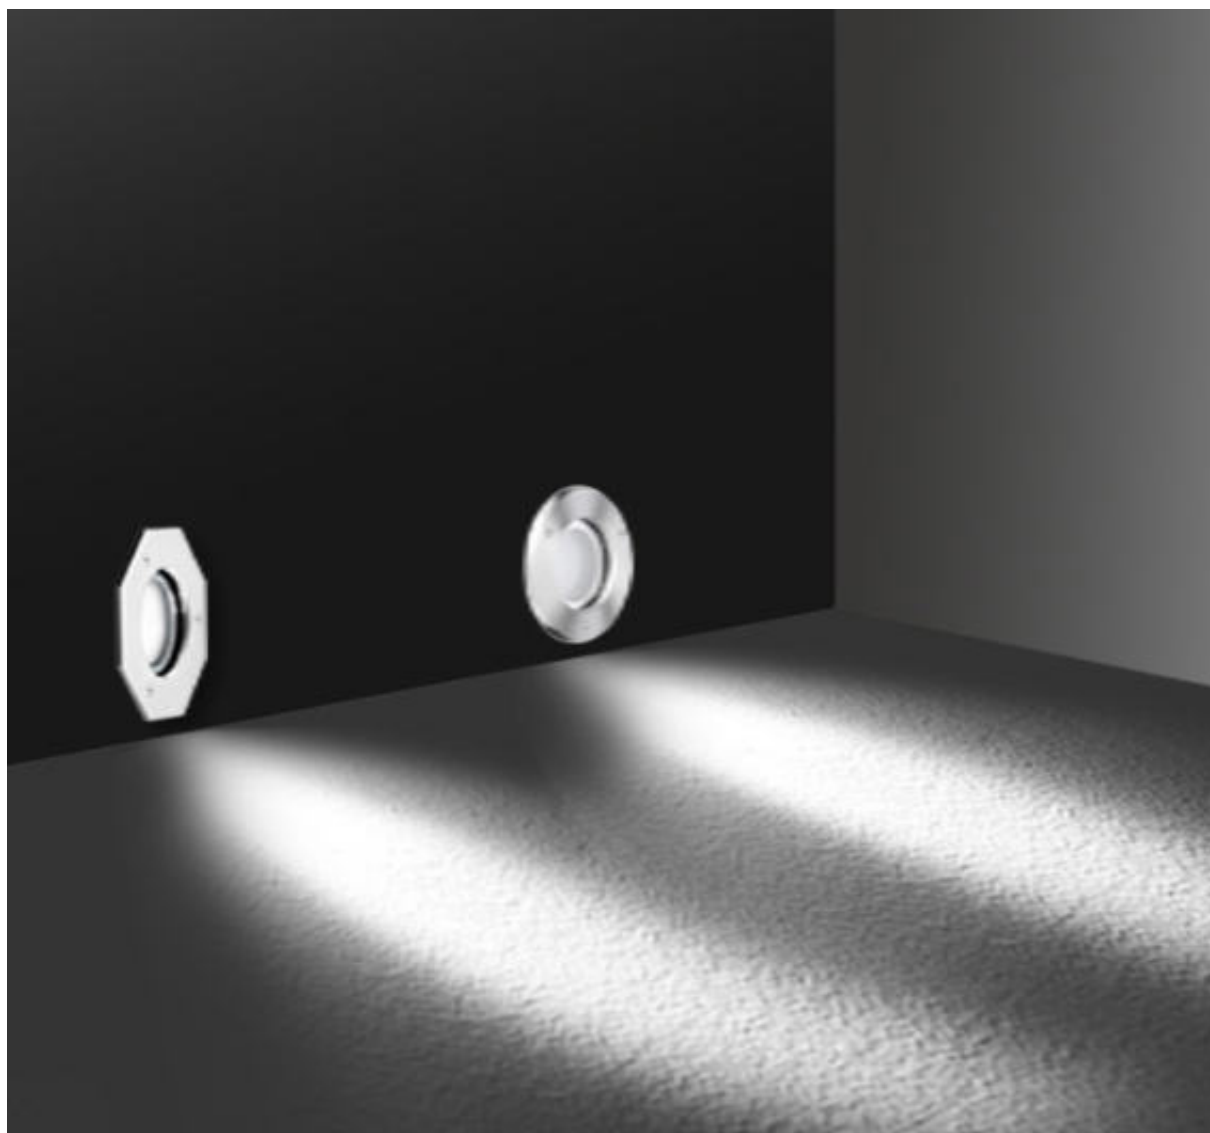

APPLICATION




Adaptable luminaire available in recessed wall, floor recessed and wall mounted versions. The wall and floor recesses have reduced depth and an AISI316L stainless steel ring which guarantees a very high resistance to oxidation. Also available with an octagonal-shaped ring that allows interesting architectural combinations. The Lucy model wall lamp is available in nylon, painted aluminum or AISI316L stainless steel. The materials used in its construction guarantee its use even in environments with high salinity.

WALL RECESSED

LUCY


SPECIFICATIONS




Installation:
Wall recessed

- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Supplied with Polypropylene PP recessed box GW750

DIMENSIONS

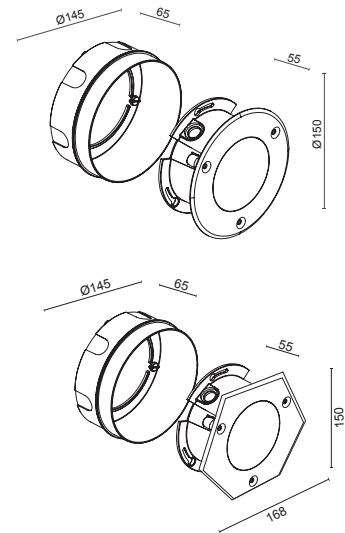

ASSEMBLY



FRAME



LED DIRECT AC SYSTEM

SALINITY RESISTANT

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
1060R/WR1.VS.99	450 lm	260 lm	3000 K	80	5W - 220-240Vac 50/60Hz	II
1060R/NR1.VS.99	475 lm	275 lm	4000 K	80	5W - 220-240Vac 50/60Hz	II



Beam >100°



Diffuse Emission
Frosted Glass



Not dimmable



LED DIRECT AC SYSTEM

SALINITY RESISTANT

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
1062R/WR1.VS.99	450 lm	260 lm	3000 K	80	5W - 220-240Vac 50/60Hz	II
1062R/NR1.VS.99	475 lm	275 lm	4000 K	80	5W - 220-240Vac 50/60Hz	II



Beam >100°



Diffuse Emission
Frosted Glass



Not dimmable

CHARACTERISTICS

- Optical system housing accessible during installation.
- Wall connection system with plastic anchoring plate
- Connection to the power supply network through cable gland for cables with a maximum diameter of 11mm type H07RN-F 3x1.5 or similar.
- LED maintenance by opening the optical compartment.
- Fixed output system with SMD LEDs with direct 230Vac power supply.
- Luminaire Conforms to EN60598-1 Standard and special requirements

MATERIALS

- Ring in AISI316L steel plate
- Wall recess in Polyamide(PA6) loaded 30% GWT960 UV Resist.
- Diffuser in extra-clear acid-etched glass internally LTF> 60%.
- Seals in EDPM closed cell rubber, UV-resist. Tx -40/+150°C.
- Passive heatsink in aluminum alloy for extrusion.
- Internal and external screws in A2 Stainless Steel
- Polyester powder coating, UV-stabilised with anti-corrosion treatment.