


MICRON

- COMBINATION ONE - (MICRON 9210)**
- The external body frame is in **aluminum** with the possibility of painting in the 8 colors proposed.
 - The main frame of the fixture is **only in polished steel**



BODY FRAME ALUMINIUM

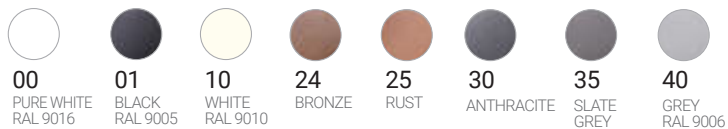

FIXTURE FRAME STAINLESS STEEL AISI316L

POLISHED STAINLESS STEEL



Example with
body frame: ANTHRACITE
fixture frame: POLISHED STEEL

Code: 9210C/WR1.VS.30




Example with
body frame: PURE WHITE
fixture frame: POLISHED STEEL

Code: 9210C/WR1.VS.00

- COMBINATION TWO - (MICRON 9211)**
- The external body frame is in **aluminum** with the possibility of painting in the 8 colors proposed.
 - The main frame of the luminaire is in **painted steel** of the same color as the external body frame




BODY FRAME ALUMINIUM

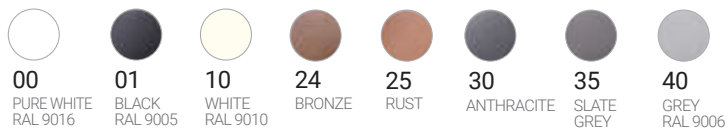

FIXTURE FRAME STAINLESS STEEL AISI316L

PAINTED STAINLESS STEEL

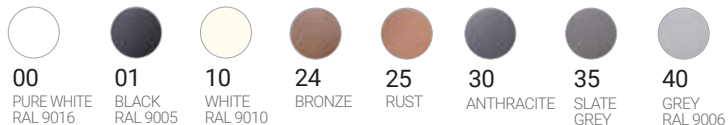

Example with
body frame: ANTHRACITE
fixture frame: ANTHRACITE PAINTED STEEL

Code: 9211C/WR1.VS.30



Example with
body frame: BRONZE
fixture frame: BRONZE PAINTED STEEL

Code: 9211C/WR1.VS.24

CEILING RECESSED

MICRON

SPECIFICATIONS



Art. 9210C / 9211C Installation:
Ceiling recessed



COMBINATION ONE - (MICRON 9210)



- La cornice-corpo più esterna è in **alluminio** con possibilità di verniciatura negli 8 colori proposti.
- La cornice principale dell'apparecchio è **unicamente in acciaio lucido**


LED DIRECT AC SYSTEM

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
9210C/WR1.VS	450 lm	260 lm	3000 K	80	5W - 220-240Vac 50/60Hz	I
9210C/NR1.VS	475 lm	275 lm	4000 K	80	5W - 220-240Vac 50/60Hz	I



- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Supplied with Polypropylene PP recessed box GW750
- **9210C supplied with springs for false ceiling fixing**

DIMENSIONS




COMBINATION TWO - (MICRON 9211)



- La cornice-corpo più esterna è in **alluminio** con possibilità di verniciatura negli 8 colori proposti.
- La cornice principale dell'apparecchio è in **acciaio verniciato** dello stesso colore della cornice-corpo esterna

LED DIRECT AC SYSTEM

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
9211C/WR1.VS	450 lm	260 lm	3000 K	80	5W - 220-240Vac 50/60Hz	I
9211C/NR1.VS	475 lm	275 lm	4000 K	80	5W - 220-240Vac 50/60Hz	I



FIXTURE FRAME (FOR 9210)



STANDARD COLOURS

