

GROUND RECESSED

# PLATHO260

## SPECIFICATIONS



- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- The device is supplied with a 300mm long cable (3x1mm<sup>2</sup>)
- Supplied with Polypropylene Box PP GW750
- **Walkable for pedestrian paths. Max load 1000Kg**
- **IP68 connector available on request**



## LED SYSTEM WITH BUILT-IN DRIVER


COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
4460R/WC90XX.99	4850 lm	3817 lm	3000	80	28W - 220-240Vac 50/60Hz	I	1
4460R/NC90XX.99	5100 lm	4015 lm	4000	80	28W - 220-240Vac 50/60Hz	I	1
4461R/WC90XX.99	4850 lm	3817 lm	3000	80	28W - 220-240Vac 50/60Hz	I	1
4461R/NC90XX.99	5100 lm	4015 lm	4000	80	28W - 220-240Vac 50/60Hz	I	1

Beam  
 XX=NB (Spot 14°)  
 XX=MB (Flood 32°)  
 XX=WB (Wide Flood 44°)

Direct Emission Uplight  
 Silk-Screen Clear Glass

Dali dimmable on request  
 with extra charge

## DIMENSIONS

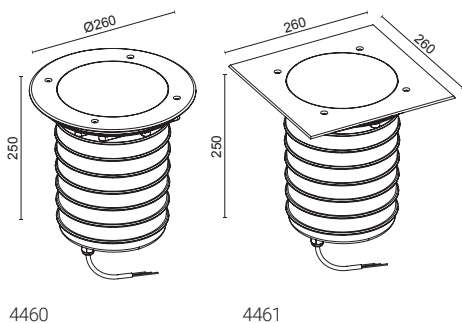

## LED ARRAY SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
4460R /WR60XX.99	3710 lm	2671 lm	3000	80	28W - 220-240Vac 50/60Hz	I	4
4460R /NR60XX.99	3930 lm	2830 lm	4000	80	28W - 220-240Vac 50/60Hz	I	4
4461R /WR60XX.99	3710 lm	2671 lm	3000	80	28W - 220-240Vac 50/60Hz	I	4
4461R /NR60XX.99	3930 lm	2830 lm	4000	80	28W - 220-240Vac 50/60Hz	I	4

Beam  
 XX=NB (Flood 20°)  
 XX=MB (Flood 32°)  
 XX=WB (Wide Flood 50°)


Direct Emission Uplight  
 Silk-Screen Clear Glass

Dali dimmable on request  
 with extra charge


## FRAME



## ACCESSORIES



**MOR683P/2V**  
 IP68 2ways/3poles connector.  
 Maximum section 3x2.5mm



**MOR683P/3V**  
 IP68 3ways/3poles branch  
 connector. Maximum section  
 3x2.5mm

GROUND RECESSED

# PLATHO260

## SPECIFICATIONS





- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- The device is supplied with a 300mm long cable (3x1mm<sup>2</sup>)
- Supplied with Polypropylene Box PP GW750
- **Walkable for pedestrian paths. Max load 1000Kg**
- **IP68 connector available on request**




## LED ARRAY SYSTEM WITH BUILT-IN DRIVER - Asymmetric

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
4460R /WR60AB.99	3540 lm	1697 lm	3000	80	28W - 220-240Vac 50/60Hz	I	4
4460R /NR60AB.99	3670 lm	1795 lm	4000	80	28W - 220-240Vac 50/60Hz	I	4
4461R /WR60AB.99	3540 lm	1697 lm	3000	80	28W - 220-240Vac 50/60Hz	I	4
4461R /NR60AB.99	3670 lm	1795 lm	4000	80	28W - 220-240Vac 50/60Hz	I	4




## DIMENSIONS

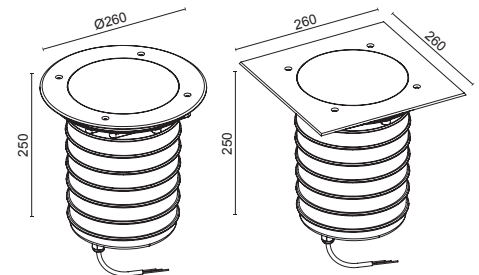


4460


4461



## ACCESSORIES



**MOR683P/2V**  
IP68 2ways/3poles connector.  
Maximum section 3x2.5mm



**MOR683P/3V**  
IP68 3ways/3poles branch  
connector. Maximum section  
3x2.5mm

## FRAME



**99**  
STAINLESS STEEL AISI316L