


RECTA




RECTA MAXI



RECTA

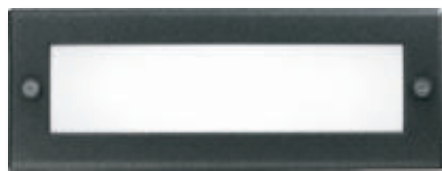

RECTA MAXI



RECTA



Always consult www.augentilighting.it
for UPDATED TECHNICAL DATA



WALL RECESSED

RECTA



APPLICATION




Recta is a product made with the highest quality materials that guarantee maximum outdoor performance. Wall-mounted, Recta is designed to last over time and ensure optimal light propagation. Elegant and refined, it will dress your outdoor spaces with style. Dali dimmable on request with extra charge.

WALL RECESSED

RECTA

SPECIFICATIONS




- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Supplied with Polypropylene PP recessed box GW750





LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
9450R/WC3.VS	1020 lm	265 lm	3000 K	80	9W - 220-240Vac 50/60Hz	I
9450R/NC3.VS	1070 lm	280 lm	4000 K	80	9W - 220-240Vac 50/60Hz	I





DIMENSIONS

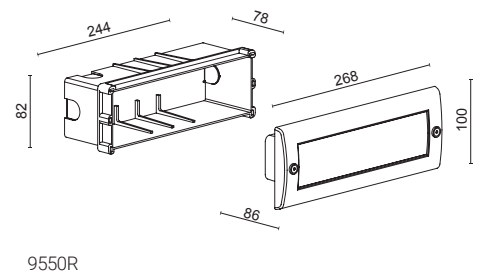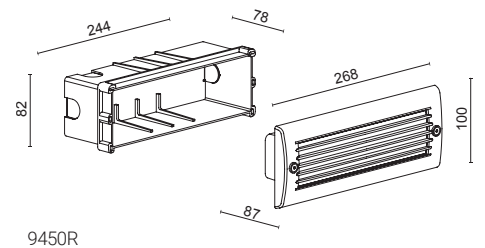


LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
9550R/WC3.VS	1020 lm	345 lm	3000 K	80	9W - 220-240Vac 50/60Hz	I
9550R/NC3.VS	1070 lm	360 lm	4000 K	80	9W - 220-240Vac 50/60Hz	I




STANDARD COLOURS

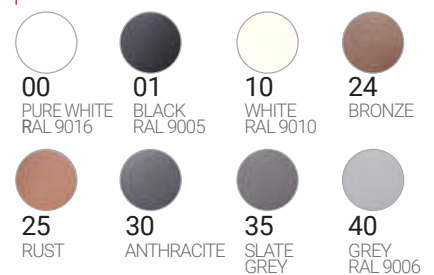

WALL RECESSED

RECTA MAXI

SPECIFICATIONS




- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- Supplied with Polypropylene PP recessed box GW750




LED SYSTEM WITH BUILT-IN DRIVER


COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
9400R/WC3.VS	1400 lm	320 lm	3000 K	80	11W - 220-240Vac 50/60Hz	I
9400R/NC3.VS	1470 lm	340 lm	4000 K	80	11W - 220-240Vac 50/60Hz	I



DIMENSIONS

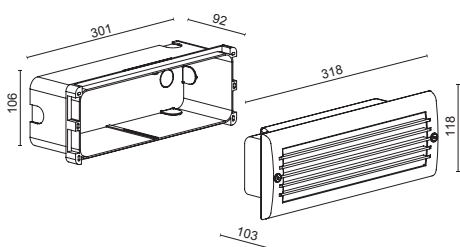

9400R

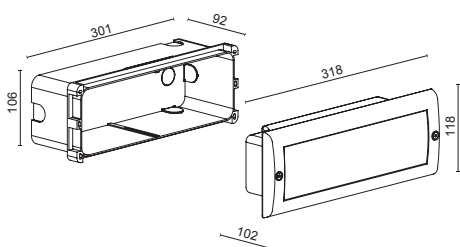


9500R



LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
9500R/WC3.VS	1400 lm	670 lm	3000 K	80	11W - 220-240Vac 50/60Hz	I
9500R/NC3.VS	1470 lm	700 lm	4000 K	80	11W - 220-240Vac 50/60Hz	I



STANDARD COLOURS



RECTA

CHARACTERISTICS

- Wall recessed luminaire with cat.V2 polymer outer casing
- Optical system housing accessible during installation.
- Body / outer casing coupling system obtained by self-tapping screws.
- Power cable entry with internal 3-way terminal block for non-pass-through wiring.
- Power cable allowed up to 1.5mm² three-pole with external sheath max. 11mm.
- LED maintenance can be carried out by removing the screws of the optical compartment.
- Luminaire Conforms to EN60598-1 Standard and special requirements


MATERIALS

- Fixture/Base in die-cast aluminum alloy.
- Closing ring in aluminum alloy for die casting.
- Recessed box in Polypropylene (PP) filled with 30% UV stabil. GWT750
- Borosilicate glass with internal acid-etched finish with transmission LT>60%.
- Molded gaskets in UV resist. Tx -40/+180°C.
- Integrated passive heatsink in Alloy Aluminum sheet.
- Internal and external screws in A2 Stainless Steel
- IP65 Megol resin cable gland UV-Resist. GWT850°C
- Polyester powder coating, UV-stabilised with anti-corrosion treatment.




ASSEMBLY

(LxWxH) 245x83x78mm



9450 - 9550

(LxWxH) 302x107x93mm



9400 - 9500