

LUCY

SALINITY RESISTANT



LUCY

SALINITY RESISTANT



# LUCY

## SALINITY RESISTANT

The carefully chosen materials and the high corrosion protection make this product suitable for installation in saline environments.

The steel outer ring is resistant to corrosion and recyclable, while the polycarbonate of the recessed body remains unaltered even in the face of high temperatures and aggressive atmospheric agents.

The absence of iron components, which oxidizing degrades the steel, determines a high longevity of the appliance in unfavorable environmental conditions such as coastal areas with high salinity.

## LINKED PRODUCTS



**LUCY WALL**  
Pag. 96



**LUCY WALL RECESSED**  
Pag. 210




Always consult [www.augenlighting.it](http://www.augenlighting.it)  
for UPDATED TECHNICAL DATA



GROUND RECESSED

# LUCY

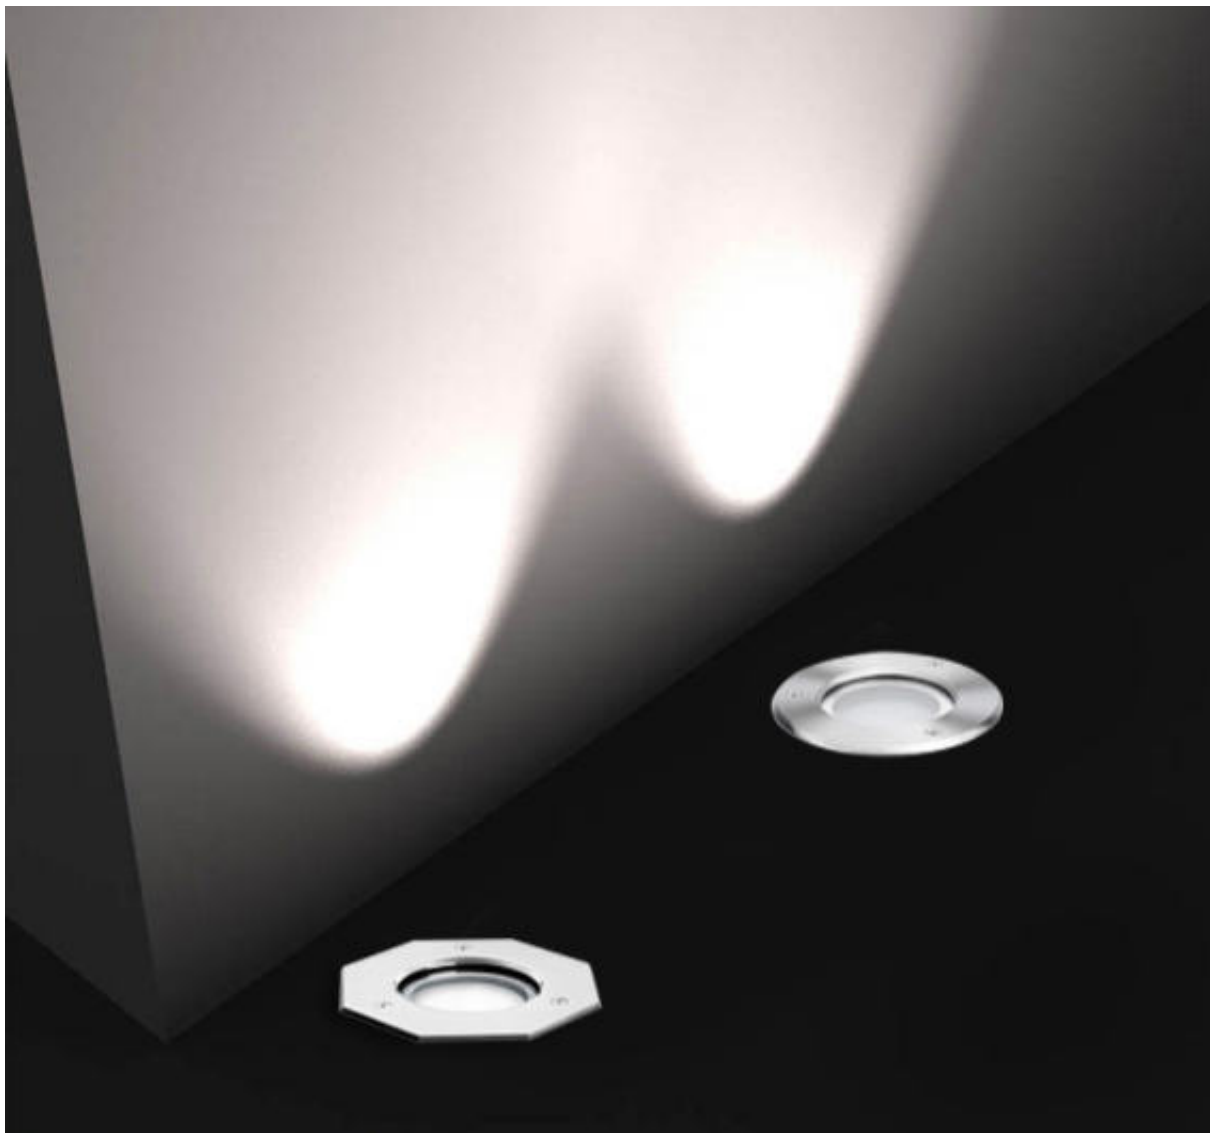

## APPLICATION



Versatile luminaire available in recessed wall, floor recessed and wall mounted versions. The recessed wall and floor recesses have reduced depth and an AISI316L stainless steel ring which guarantee a very high resistance to oxidation. Also available with an octagonal-shaped ring that allows interesting architectural combinations. The "LUCY" model wall lamp is available in NYLON, painted aluminum or AISI316L stainless steel. The materials used in its construction guarantee its use even in environments with high salinity.

GROUND RECESSED

# LUCY

## SPECIFICATIONS





- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Supplied with recessed box in Polyamide PA6 GW960
- **Walkable for pedestrian paths. Max load 500Kg**



### LED DIRECT AC SYSTEM

**SALINITY RESISTANT**



COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
1061R/WR1.VS.99	450 lm	260 lm	3000 K	80	5W - 220-240Vac 50/60Hz	II
1061R/NR1.VS.99	475 lm	275 lm	4000 K	80	5W - 220-240Vac 50/60Hz	II




### LED DIRECT AC SYSTEM

**SALINITY RESISTANT**

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL
1063R/WR1.VS.99	450 lm	260 lm	3000 K	80	5W - 220-240Vac 50/60Hz	II
1063R/NR1.VS.99	475 lm	275 lm	4000 K	80	5W - 220-240Vac 50/60Hz	II




## DIMENSIONS

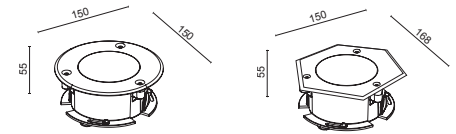


1061R

1063R



## ASSEMBLY

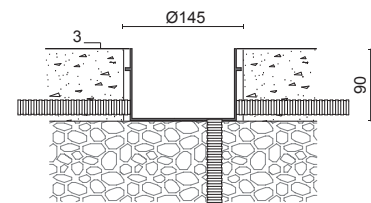

## FRAME



**99**  
STAINLESS STEEL AISI316L

## CHARACTERISTICS

- Optical system housing accessible during installation.
- Ground connection system with plastic anchoring plate
- Connection to the power supply network through cable gland for cables max diameter 11mm type H07RN-F 3x1.5 or similar.
- LED maintenance by opening the optical compartment.
- Fixed output system with SMD LEDs with direct 230Vac power supply.
- Luminaire Conforms to EN60598-1 Standard and special requirements

## MATERIALS

- Ring in AISI316L steel plate
- Ground recessed unit in Polyamide (PA6) filled with 30% GWT960 UV Resist.
- Diffuser in extra-clear acid-etched glass internally LTF > 60%.
- Seals in EDPM closed cell rubber, UV- resist. Tx -40/+150°C.
- Passive heatsink in aluminum alloy for extrusion.
- Internal and external screws in A2 Stainless Steel
- Polyester powder coating, UV-stabilised with anti-corrosion treatment.