


# MODDO



## LINKED PRODUCTS

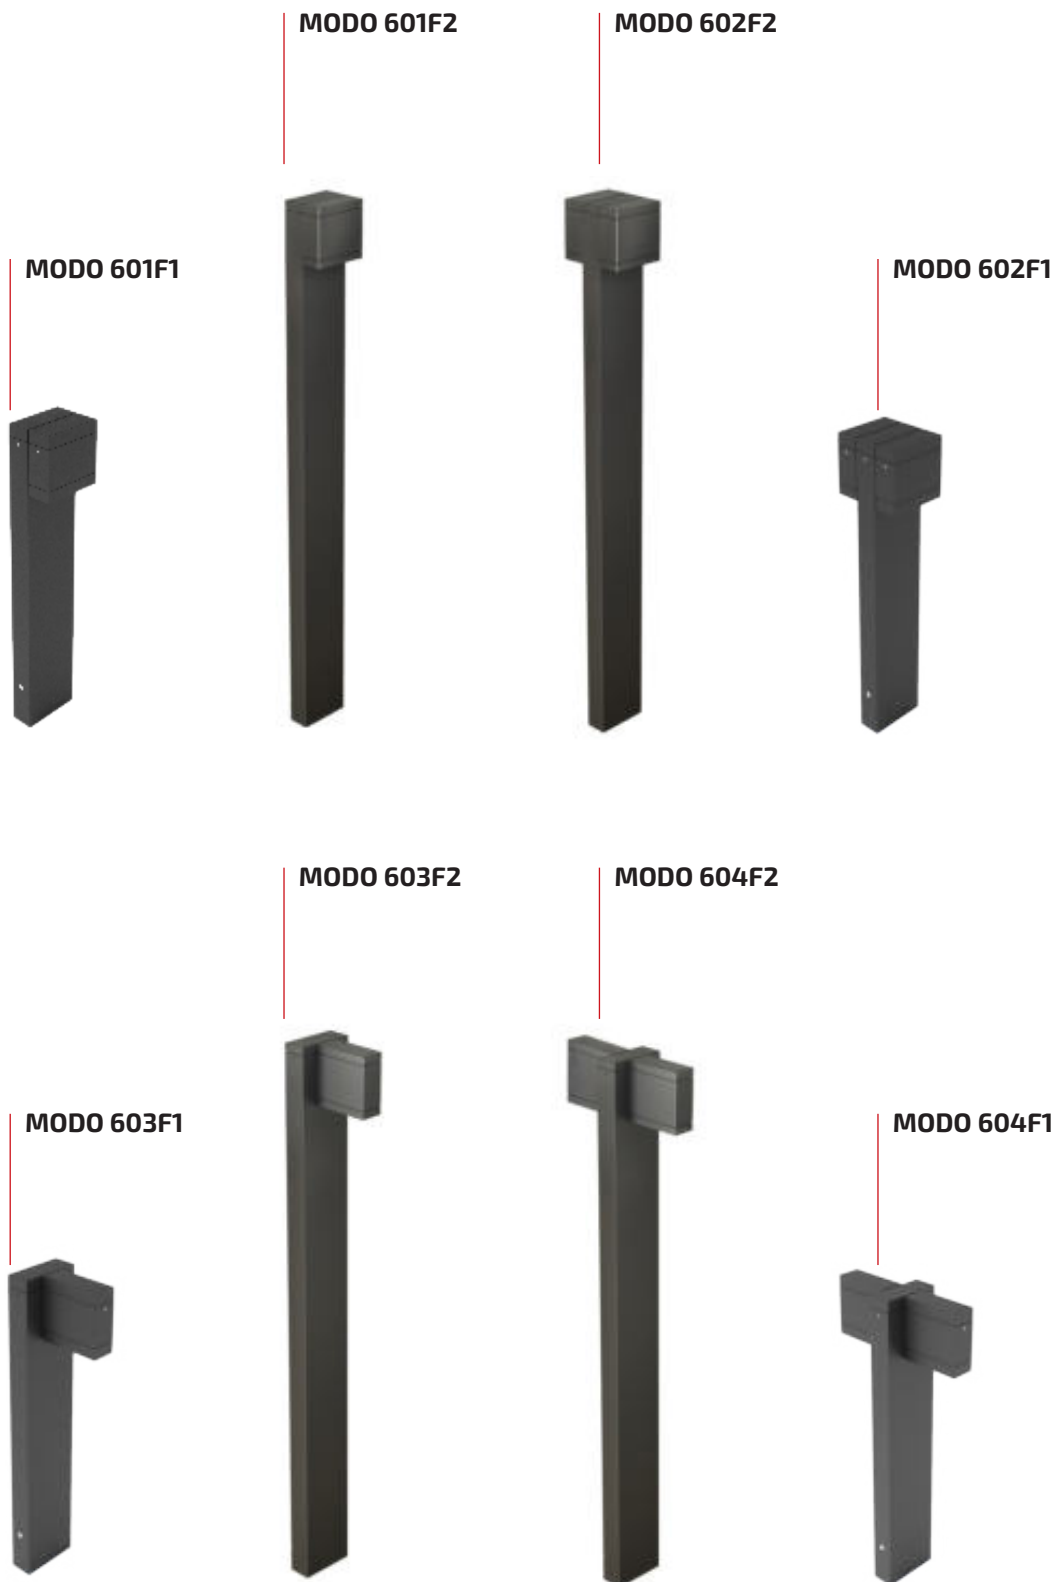

**MODDO WALL**  
Pag. 20



**MODDO SUSPENSION**  
Pag. 106



**MODDO FLOODLIGHT**  
Pag. 130



Always consult [www.augentilighting.it](http://www.augentilighting.it) for  
**UPDATED TECHNICAL DATA**



# MODO



## APPLICATION



A simple parallelepiped, with a minimal line and compact dimensions for a bollard system oriented according to the light requirements. Luminaire capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer. Dali dimmable on request with extra charge.



MODO 601F1



MODO 602F2

# MODO 601

## SPECIFICATIONS





Installation:  
Ground

- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- **Ground connection system with anchoring brackets to be ordered separately (KIT.020)**




## LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
601F1/WP70XX	790 lm	344 lm	3000K	>80	8W - 220-240Vac 50/60Hz	I	3
601F1/NP70XX	900 lm	374 lm	4000K	>80	8W - 220-240Vac 50/60Hz	I	3



## DIMENSIONS

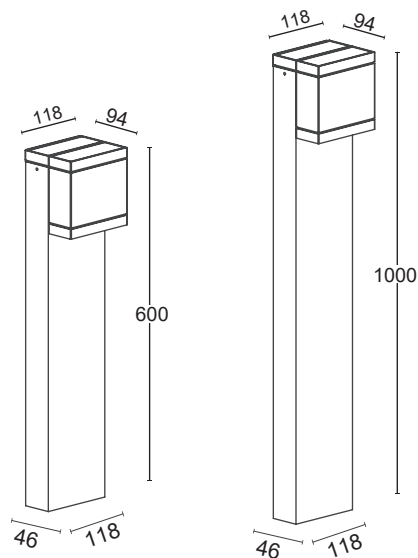




601F1

601F2



## LED SYSTEM WITH BUILT-IN DRIVER


COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
601F2/WP70XX	790 lm	344 lm	3000K	>80	8W - 220-240Vac 50/60Hz	I	3
601F2/NP70XX	900 lm	374 lm	4000K	>80	8W - 220-240Vac 50/60Hz	I	3




## STANDARD COLOURS



## ACCESSORIES



**MOR683P/2V**  
IP68 2ways/3poles connector.  
Maximum section 3x2.5mm



**MOR68Y3P/3V**  
IP68 3ways/3poles connector Y.  
Maximum section 3x2.5mm

SMALL POLES

# MODO 602

## SPECIFICATIONS



- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- **Ground connection system with anchoring brackets to be ordered separately (KIT.020)**



### LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
602F1/WP70XX	1580 lm	688 lm	3000K	>80	16W - 220-240Vac 50/60Hz	I	6
602F1/NP70XX	1800 lm	748 lm	4000K	>80	16W - 220-240Vac 50/60Hz	I	6


Beam  
XX=A2 (Asymmetric)  
XX=WB (Wide Flood 50°)

Double Emission  
Silk-Screen Clear Glass

Dali dimmable on request  
with extra charge



## DIMENSIONS

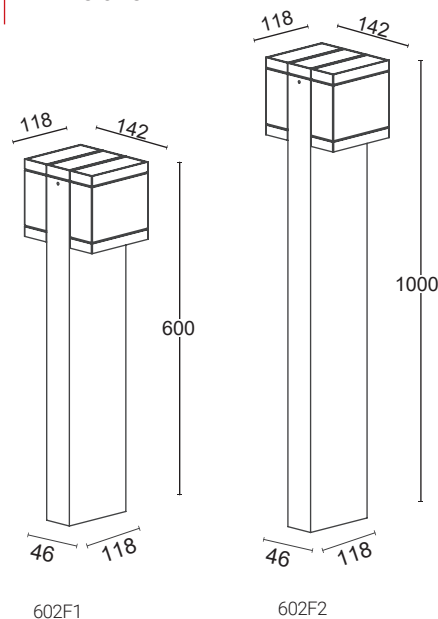

### LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
602F2/WP70XX	1580 lm	688 lm	3000K	>80	16W - 220-240Vac 50/60Hz	I	6
602F2/NP70XX	1800 lm	748 lm	4000K	>80	16W - 220-240Vac 50/60Hz	I	6

Beam  
XX=A2 (Asymmetric)  
XX=WB (Wide Flood 50°)


Double Emission  
Silk-Screen Clear Glass

Dali dimmable on request  
with extra charge


## STANDARD COLOURS



## ACCESSORIES



**MOR683P/2V**  
IP68 2ways/3poles connector.  
Maximum section 3x2.5mm



**MOR68Y3P/3V**  
IP68 3ways/3poles connector Y.  
Maximum section 3x2.5mm

# MODO 603

## SPECIFICATIONS





- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- **Ground connection system with anchoring brackets to be ordered separately (KIT.020)**




## LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
603F1/WP70XX	790 lm	344 lm	3000K	>80	8W - 220-240Vac 50/60Hz	I	3
603F1/NP70XX	900 lm	374 lm	4000K	>80	8W - 220-240Vac 50/60Hz	I	3
603F1/WP70BB	260 lm	145 lm	3000K	>80	3.5W - 220-240Vac 50/60Hz	I	1
603F1/NP70BB	300 lm	177 lm	4000K	>80	3.5W - 220-240Vac 50/60Hz	I	1





## DIMENSIONS

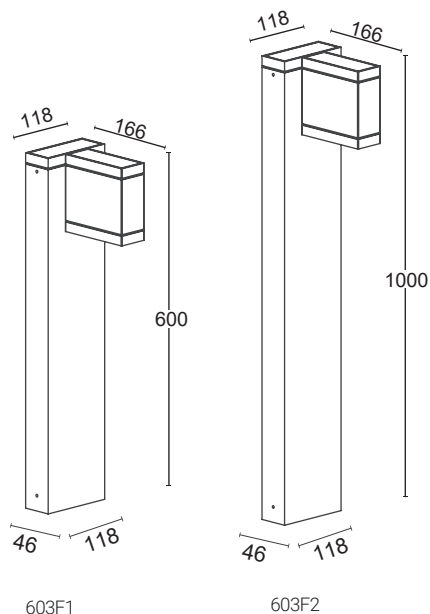

## LED SYSTEM WITH BUILT-IN DRIVER


COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
603F2/WP70XX	790 lm	344 lm	3000K	>80	8W - 220-240Vac 50/60Hz	I	3
603F2/NP70XX	900 lm	374 lm	4000K	>80	8W - 220-240Vac 50/60Hz	I	3
603F2/WP70BB	260 lm	145 lm	3000K	>80	3.5W - 220-240Vac 50/60Hz	I	1
603F2/NP70BB	300 lm	177 lm	4000K	>80	3.5W - 220-240Vac 50/60Hz	I	1




## STANDARD COLOURS



## ACCESSORIES



**MOR683P/2V**  
IP68 2ways/3poles connector.  
Maximum section 3x2.5mm



**MOR68Y3P/3V**  
IP68 3ways/3poles connector Y.  
Maximum section 3x2.5mm



SMALL POLES

# MODO 604

## SPECIFICATIONS



### LED SYSTEM WITH BUILT-IN DRIVER

COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
604F1/WP70XX	1580 lm	688 lm	3000K	>80	16W - 220-240Vac 50/60Hz	I	6
604F1/NP70XX	1800 lm	748 lm	4000K	>80	16W - 220-240Vac 50/60Hz	I	6
604F1/WP70BB	520 lm	290 lm	3000K	>80	7W - 220-240Vac 50/60Hz	I	2
604F1/NP70BB	600 lm	354 lm	3000K	>80	7W - 220-240Vac 50/60Hz	I	2

Beam  
XX=A2 (Asymmetric)  
XX=WB (Wide Flood 50°)  
BB (Straight Blade 4°)

Double Emission  
Silk-Screen Clear Glass

Dali dimmable on request  
with extra charge

- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Lower powers are available on request, only for version with built-in driver
- Dimmable system available on request only with built-in driver
- **Ground connection system with anchoring brackets to be ordered separately (KIT.020)**



### LED SYSTEM WITH BUILT-IN DRIVER


COD.	Source Flux	Fixture Flux	CCT	CRI	Power	CL	LED
604F2/WP70XX	1580 lm	688 lm	3000K	>80	16W - 220-240Vac 50/60Hz	I	6
604F2/NP70XX	1800 lm	748 lm	4000K	>80	16W - 220-240Vac 50/60Hz	I	6
604F2/WP70BB	520 lm	290 lm	3000K	>80	7W - 220-240Vac 50/60Hz	I	2
604F2/NP70BB	600 lm	354 lm	3000K	>80	7W - 220-240Vac 50/60Hz	I	2

Beam  
XX=A2 (Asymmetric)  
XX=WB (Wide Flood 50°)  
BB (Straight Blade 4°)

Double Emission  
Silk-Screen Clear Glass

Dali dimmable on request  
with extra charge

## DIMENSIONS

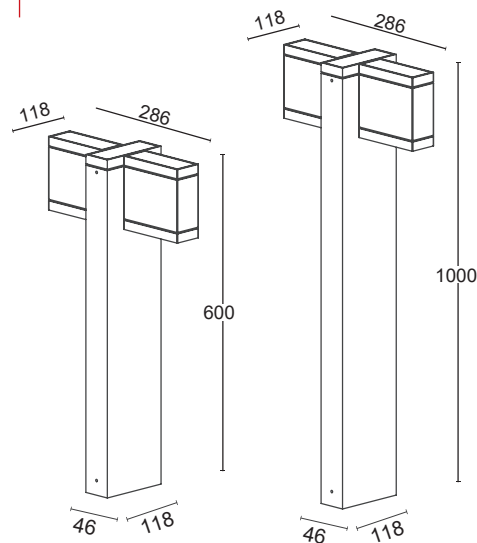


604F1

604F2


## STANDARD COLOURS



## ACCESSORIES



**MOR683P/2V**  
IP68 2ways/3poles connector.  
Maximum section 3x2.5mm



**MOR68Y3P/3V**  
IP68 3ways/3poles connector Y.  
Maximum section 3x2.5mm





SMALL POLES

MOD0 603F2




# MOD0



## PHOTOMETRICS DATA



**ASYMMETRIC A2**



**WIDE FLOOD 50°**



**BLADE 4°**


## CHARACTERISTICS

- Optical/Driver section not accessible during installation.
- LED maintenance can be carried out by opening the optical compartment. LED module by Augenti
- Driver maintenance can be performed by opening the main body.
- Rear cable entry (cable supplied with Floodlight version)
- Luminaire Conforms to EN60598-1 Standard and special requirements


## MATERIALS

- Extra Clear Tempered Glass 4mm with silk-screen printing.
- Body in Extruded Aluminium Alloy
- Caps in Die-cast Aluminium
- Heatsink integrated into fixture in Die-cast Aluminium
- Gaskets in EPDM Rubber Tmax 120°C UV resistant
- Brackets (Internal/External) in AISI430F Stainless Steel polyester powder painted
- A2 stainless steel screws Polyester powder paint finish resistant to corrosion and sea mist (ISO7523)

## ASSEMBLY



With metal plugs for concrete

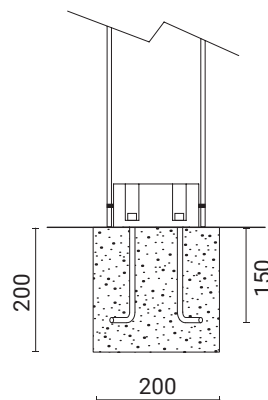

With metal anchor bolts  
(available upon request)