

NOVA

410F2
PT



410F1
PT



410F0
PT



410F2X3




410F1X3




410F0
X3




Always consult www.augentighting.it for
UPDATED TECHNICAL DATA

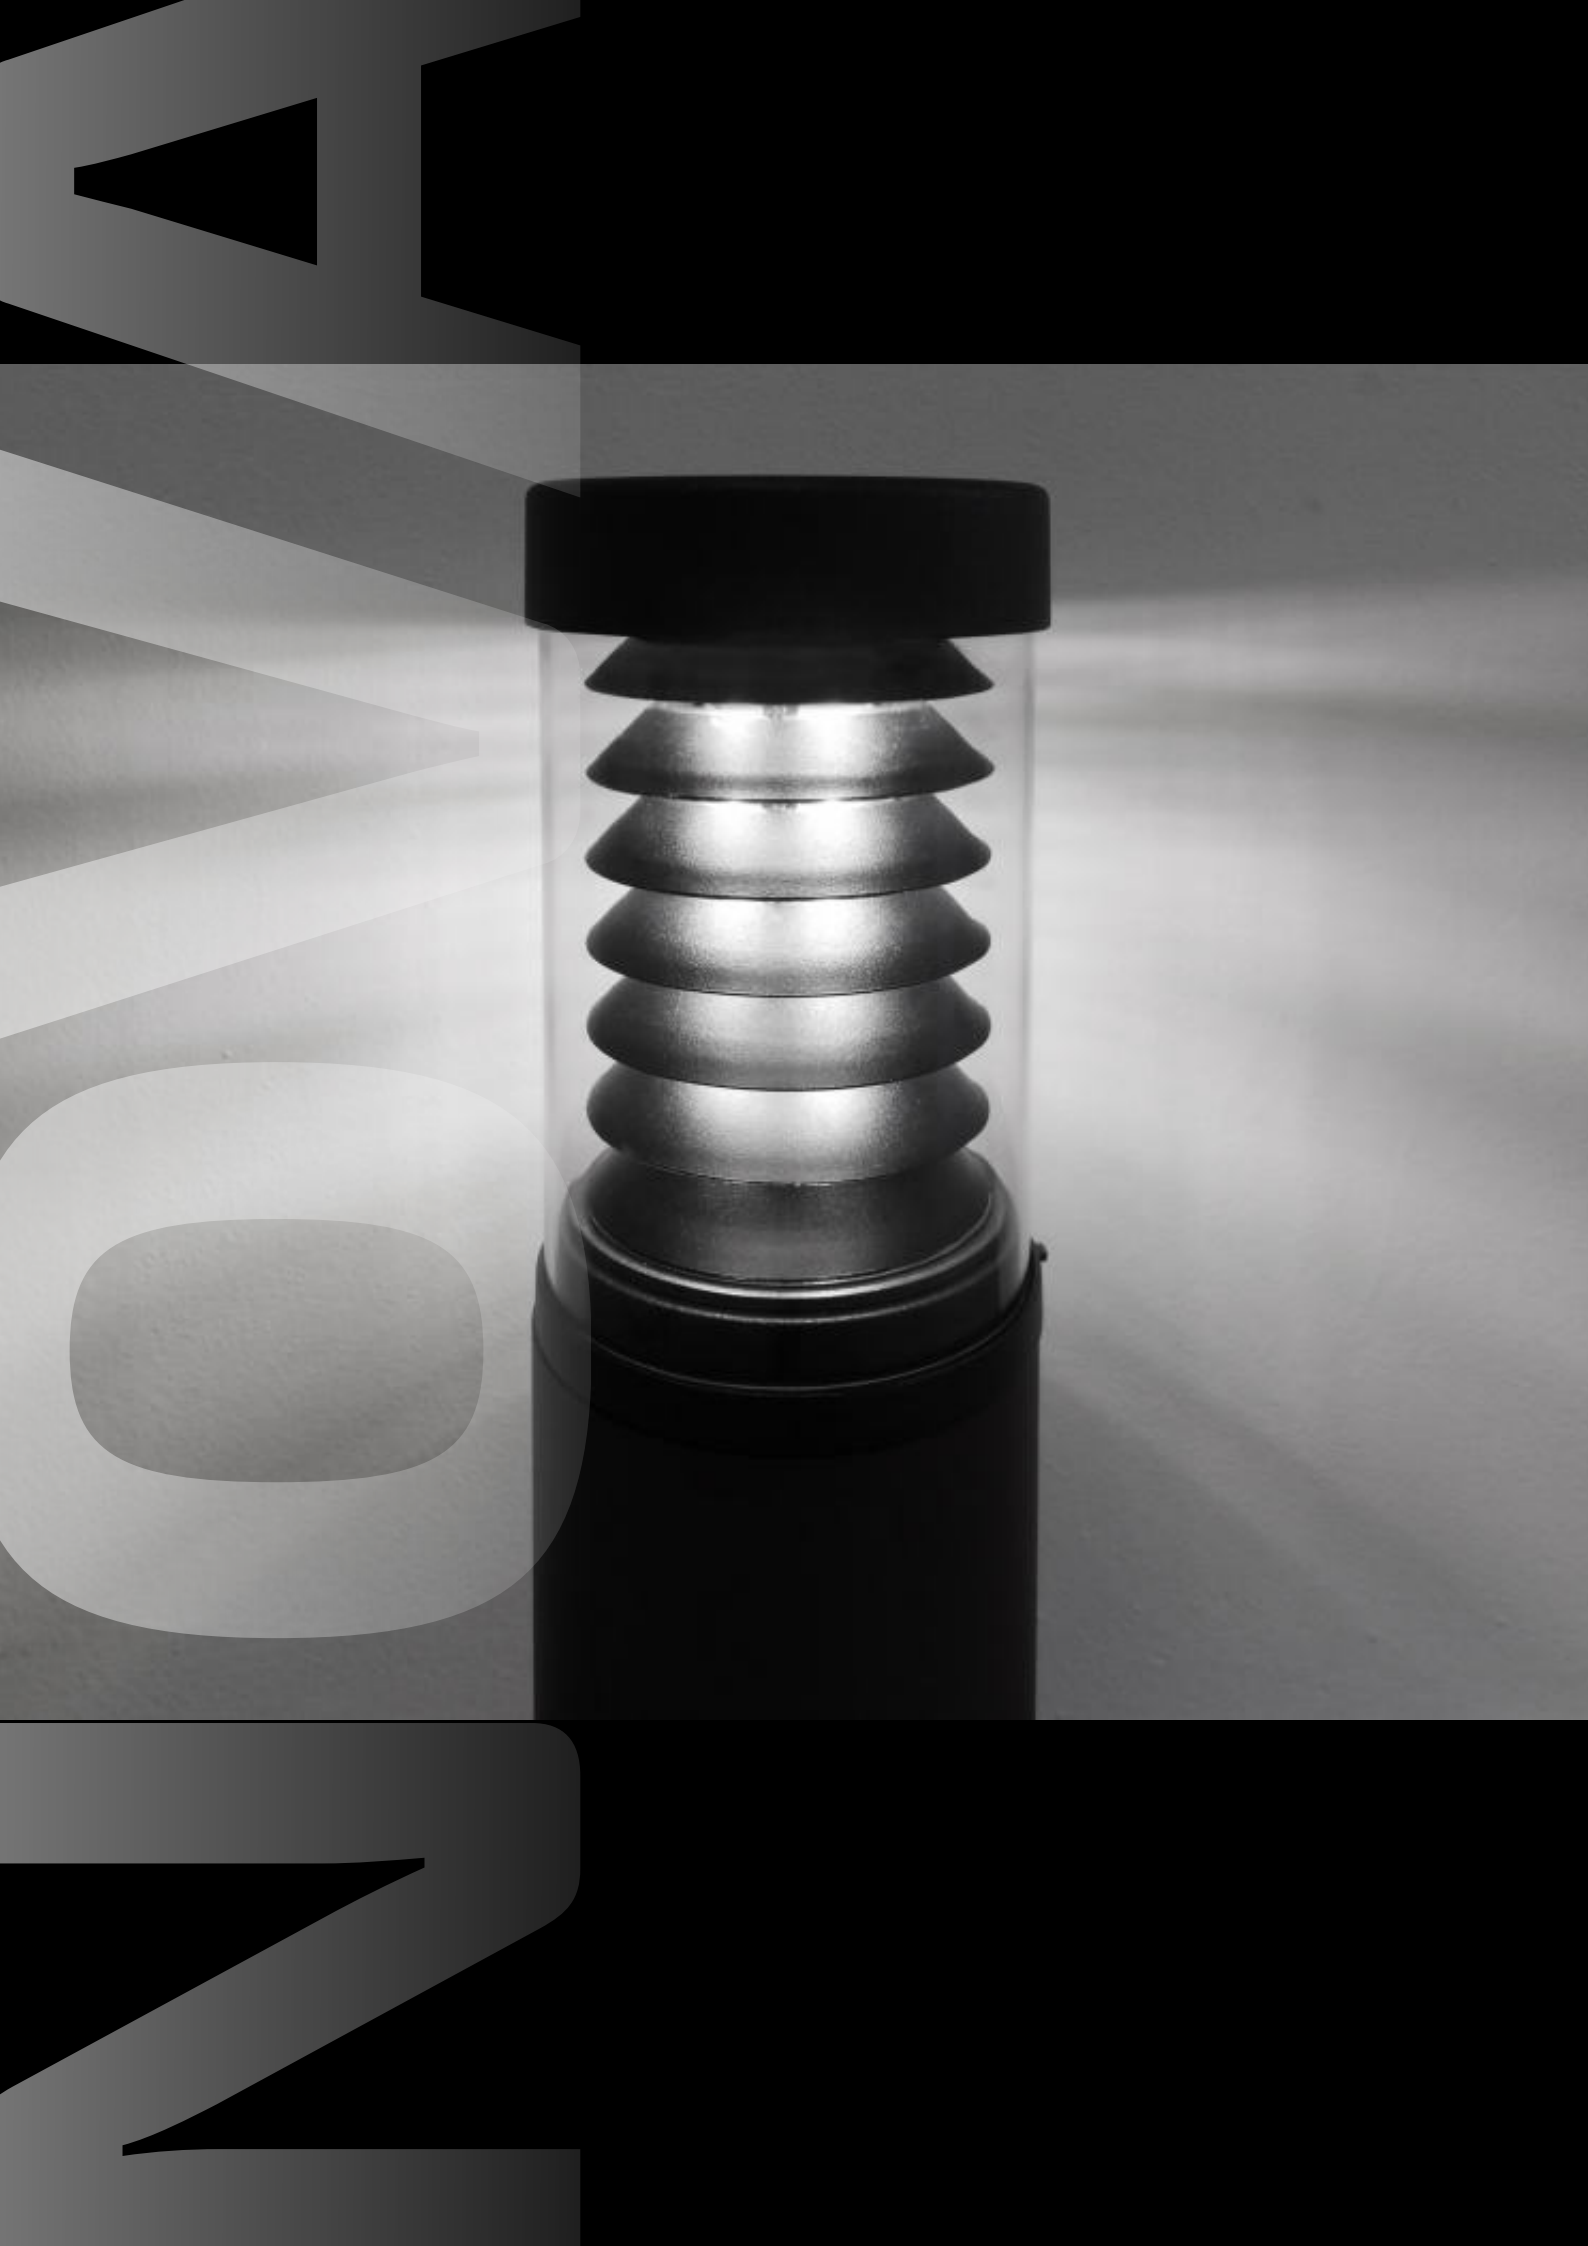

NOVA

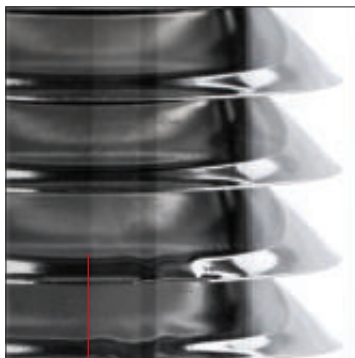

DETAIL REFLECTOR PT
Chromed steel louvres

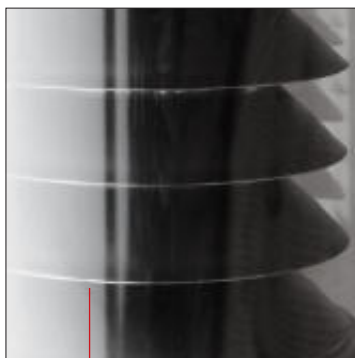

DETAIL REFLECTOR X3
Black painted ABS louvres with chromed steel edge detail



APPLICATION



Nova is specially designed for residential lighting of paths, gardens, avenues, all in compliance with the Regulations on Light Pollution through the use of refracting or radial optics at 360 ° which guarantee a predominantly direct emission towards the ground.

The structure is equipped with a high-strength technopolymer flange that allows installation in complete safety even on substrates that are extremely subject to the presence of water. In addition, the addition of metal anchors makes the anchoring stable even in substrates that are not completely stable.

The three available heights guarantee a high flexibility of application according to the needs. The lamp body firmly connected to the pole by means of a bayonet coupling makes it easily removable during normal maintenance operations.

SMALL POLES

NOVA 410F0

SPECIFICATIONS




- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Dimmable system available on request only with built-in driver
- **Ground connection system with anchoring brackets to be ordered separately (KIT.005)**



LED SYSTEM WITH BUILT-IN DRIVER

REVIEW


COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
410F0/WR8.PT	2840 lm	1150 lm	3000 K	80	20W- 220-240Vac 50/60Hz	II
410F0/NR8.PT	2976 lm	1209 lm	4000 K	80	20W- 220-240Vac 50/60Hz	II




LED SYSTEM WITH BUILT-IN DRIVER

REVIEW


COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
410F0/WR8.X3	2840 lm	537 lm	3000 K	80	20W- 220-240Vac 50/60Hz	II
410F0/NR8.X3	2976 lm	565 lm	4000 K	80	20W- 220-240Vac 50/60Hz	II




DIMENSIONS



ACCESSORIES




MOR683P/2V
IP68 2ways/3poles connector.
Maximum section 3x2.5mm




MOR68Y3P/3V
IP68 3ways/3poles connector Y.
Maximum section 3x2.5mm

LIGHT DIFFUSION

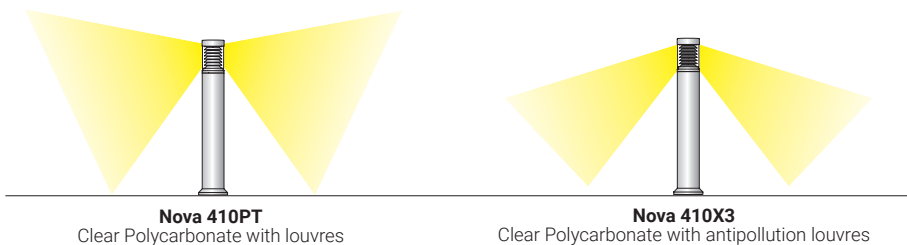

STANDARD COLOURS

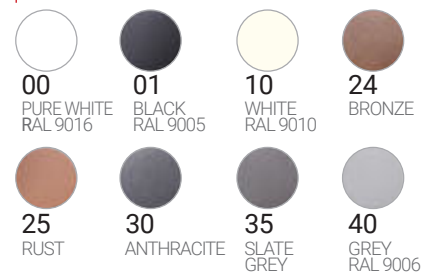

SMALL POLES

NOVA 410F1

SPECIFICATIONS




- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Dimmable system available on request only with built-in driver
- **Ground connection system with anchoring brackets to be ordered separately (KIT.005)**




LED SYSTEM WITH BUILT-IN DRIVER

REVIEW

COD.	Source Flux	Flusso Apparecchio	CCT	CR11	Power	CL
410F1/WR8.PT	2840 lm	1150 lm	3000 K	80	20W- 220-240Vac 50/60Hz	II
410F1/NR8.PT	2976 lm	1209 lm	4000 K	80	20W- 220-240Vac 50/60Hz	II



DIMENSIONS

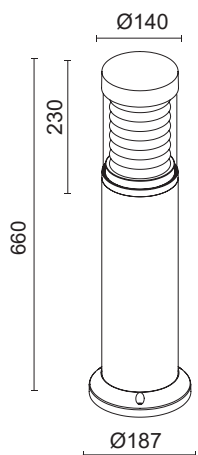


LED SYSTEM WITH BUILT-IN DRIVER

REVIEW


COD.	Source Flux	Flusso Apparecchio	CCT	CR11	Power	CL
410F1/WR8.X3	2840 lm	537 lm	3000 K	80	20W- 220-240Vac 50/60Hz	II
410F1/NR8.X3	2976 lm	565 lm	4000 K	80	20W- 220-240Vac 50/60Hz	II



ACCESSORIES



MOR683P/2V
IP68 2ways/3poles connector.
Maximum section 3x2.5mm




MOR68Y3P/3V
IP68 3ways/3poles connector Y.
Maximum section 3x2.5mm

STANDARD COLOURS



LIGHT DIFFUSION

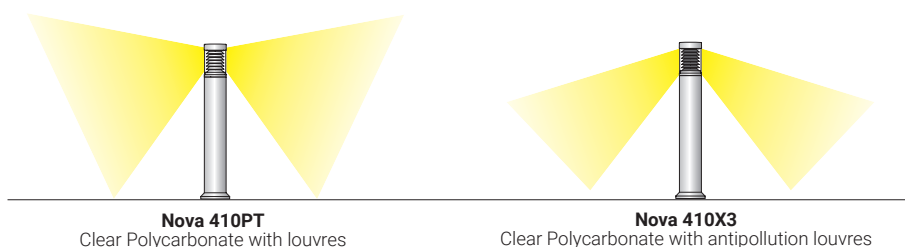



SMALL POLES

NOVA 410F2

SPECIFICATIONS




- The rated flux values refer to source LED at Ts85°C / ta25°C
- The Power/Flux in the table refer to maximum installable value
- Dimmable system available on request only with built-in driver
- **Ground connection system with anchoring brackets to be ordered separately (KIT.005)**


LED SYSTEM WITH BUILT-IN DRIVER

REVIEW

COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
410F2/WR8.PT	2840 lm	1150 lm	3000 K	80	20W- 220-240Vac 50/60Hz	II
410F2/NR8.PT	2976 lm	1209 lm	4000 K	80	20W- 220-240Vac 50/60Hz	II




DIMENSIONS

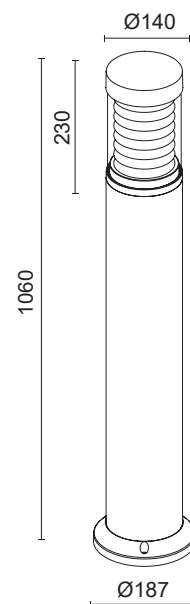


LED SYSTEM WITH BUILT-IN DRIVER

REVIEW


COD.	Source Flux	Flusso Apparecchio	CCT	CRII	Power	CL
410F2/WR8.X3	2840 lm	537 lm	3000 K	80	20W- 220-240Vac 50/60Hz	II
410F2/NR8.X3	2976 lm	565 lm	4000 K	80	20W- 220-240Vac 50/60Hz	II



ACCESSORIES




MOR683P/2V
IP68 2ways/3poles connector.
Maximum section 3x2.5mm




MOR68Y3P/3V
IP68 3ways/3poles connector Y.
Maximum section 3x2.5mm

LIGHT DIFFUSION

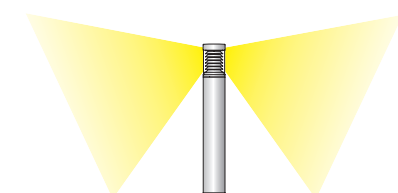

Nova 410PT
Clear Polycarbonate with louvres

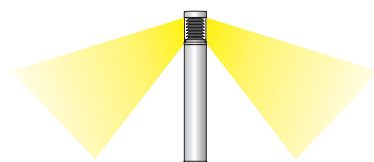

Nova 410X3
Clear Polycarbonate with antipollution louvres

STANDARD COLOURS





SMALL POLES

NOVA



CHARACTERISTICS

- Pole luminaire for asymmetrical light with downward flux > 85%
- Optical compartment not accessible during installation.
- Power cable entry with internal 3-way terminal block for non-pass-through wiring.
- Power cable allowed up to 1.5mm² three-pole with external sheath max. 11mm.
- LED system with built-in driver 220-240V/50-60Hz
- LED maintenance can be carried out by removing the rods of the optical compartment with removal of the screen
- Driver maintenance can be carried out by removing the pole head section.
- Luminaire Conforms to EN60598-1 Standard and special requirements

MATERIALS

- Fixture/Base in die-cast aluminum alloy.
- Pole: Aluminum alloy for extrusion.
- Diffuser in transparent polycarbonate (PC) UV Stab. GWT960
- ABS chromed louvre GWT750 UV Stab.
- Reflector: Aluminum alloy molded gaskets in UV resist. Tx -40/+180°C.
- Integrated passive heatsink in Aluminum extrusion.
- Internal and external screws in A2 Stainless Steel
- IP68 cable gland in PS for retaining the power supply cable.
- Polyester powder coating, UV-stabilised with anti-corrosion treatment.

ASSEMBLY

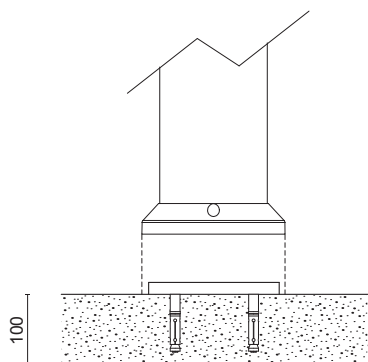

Ground connection system with anchoring brackets to be ordered separately
The orientation is independent of the layout of the ground attachment holes

KIT.005 Ground connection system to be ordered separately

