



Serie di apparecchi incassati a parete dalla ridotta profondità di incasso. Sono studiati per l'illuminazione di vialetti, scale e passaggi a luce diffusa. La costruzione del corpo, in lega di alluminio ad alta resistenza alla ossidazione sottoposto a trattamento con nano-bonderite e protetto con verniciatura a polvere poliestere texturizzata, rendono il prodotto resistente agli agenti atmosferici ed ai raggi UV garantendone la massima protezione nel corso degli anni. Le guarnizioni in silicone assicurano la massima tenuta in tutte le condizioni operative e di temperatura. Il diffusore in vetro sodico calcico temprato rifinito con serigrafia ed bordo molato donano un tocco di classe all'apparecchio. Il prodotto si installa con una cassaforma standard 503 in polistirene è adatta sia per calcestruzzo che per muri convenzionali. La versione per cartongesso si installa in modo semplice con molle in acciaio armonico.


Series of recessed wall luminaires with reduced recessed depth. They are designed for lighting of paths, stairs and passages with diffused light. The construction of the body, in aluminum alloy with high resistance to oxidation, treated with nano-bonderite and protected with polyester powdercoating, make the product resistant to atmospheric agents and UV rays, guaranteeing maximum protection over the years. The silicone gaskets ensure maximum sealing in all operating and temperature conditions. The diffuser in tempered sodium calcium glass finished with silk-screen printing and bevelled edge gives a touch of class to the fixture. The product is installed with a standard 503 polystyrene rough-in housing and is suitable for both concrete and conventional walls. The drywall version is easy to install with harmonic steel springs.



| | |
|--|---|
| CERTIFICAZIONI CERTIFICATION | CE ENEC UK CB CBM DIM 1000 ALU SLAB |
| GRADO DI PROTEZIONE IP / IK RATING | IP 65 / IK 07 |
| CLASSE DI ISOLAMENTO CLASSIFICATION | classe III class III |
| DIMMERABILE DIMMABLE | dimmerabile in base al driver utilizzato dimmable based on driver used |
| CORPO BODY | alluminio pressofuso EN AB 44100 alta resistenza all'ossidazione die-cast aluminium EN AB 44100 high resistance to oxidation |
| CONTROCASSA ROUGH-IN HOUSING | termoplastico - da ordinare separatamente thermoplastic to be ordered separately |
| DIFFUSORE DIFFUSER | vetro sodico calcico temprato diffondente 5 mm soda-lime tempered diffuser glass 5 mm |
| GUARNIZIONI SEALING GASKET | silicone silicone |
| CABLAGGIO WIRING | apparecchio fornito con cavo 0,2m precablato H05RN-F fixture supplied with pre-wired cable 0,2m long H05RN-F |
| SORGENTE LUMINOSA LIGHT SOURCE | Led incluso Led integral |
| FINITURA FINISH | verniciatura in polveri poliestere ad alta resistenza ai raggi UV ed alla corrosione / vetro temprato e serigrafato powder coating polyester high resistance to UV and oxidation / tempered serigrafed glass |




Vai alla pagina
Web del prodotto
Go to the product Web page

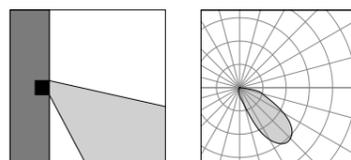

- Vetro Bianco V1 
White Glass
- Vetro Nero V2 
Black Glass
- Acciaio inossidabile 15 
Stainless Steel
- Altre finiture disponibili sul sito web
Other finishes available on the website 

2W LED 3000K / 4000K / BLUE
102lm - 288lm
asymmetrical
max 24V DC / 110-240 V / 50-60 Hz
alimentatore remoto SELV non incluso
remote SELV led driver not included

GH1600



ACCESSORI ACCESSORIES



AC088.0024040FN-67
LED driver IP67 24V DC 40W
LED driver IP67 24V DC 40W

AC146.0024014FN-67
LED driver IP67 24V DC 14W
LED driver IP67 24V DC 14W

AC184.0024016SN-20
Alimentatore IP20 24V DC 16W
LED driver IP20 24V DC 16W

AC042.0024020SD-20
Alimentatore IP20 24V DC 20W DALI
LED driver IP20 24V DC 20W DALI




AC503
Cassaforma da incasso
Wall recessed rough-in housing

Passo Spring



2W LED 3000K / 4000K / BLUE
102lm - 288lm
asymmetrical
max 24V DC / 110-240 V / 50-60 Hz
alimentatore remoto SELV non incluso
remote SELV led driver not included

GH1601



ACCESSORI ACCESSORIES



AC088.0024040FN-67
LED driver IP67 24V DC 40W
LED driver IP67 24V DC 40W

AC146.0024014FN-67
LED driver IP67 24V DC 14W
LED driver IP67 24V DC 14W

AC184.0024016SN-20
Alimentatore IP20 24V DC 16W
LED driver IP20 24V DC 16W

AC042.0024020SD-20
Alimentatore IP20 24V DC 20W DALI
LED driver IP20 24V DC 20W DALI

Vetro Bianco **V1** 
White Glass

Vetro Nero **V2** 
Black Glass

Acciaio inossidabile **15** 
Stainless Steel


Altre finiture disponibili sul sito web
Other finishes available on the website 

Passo Screw



2W LED 3000K / 4000K / BLUE
102lm - 288lm
asymmetrical
max 24V DC / 110-240 V / 50-60 Hz
alimentatore remoto SELV non incluso
remote SELV led driver not included

GH1604



ACCESSORI ACCESSORIES



AC088.0024040FN-67
LED driver IP67 24V DC 40W
LED driver IP67 24V DC 40W

AC146.0024014FN-67
LED driver IP67 24V DC 14W
LED driver IP67 24V DC 14W

AC184.0024016SN-20
Alimentatore IP20 24V DC 16W
LED driver IP20 24V DC 16W

AC042.0024020SD-20
Alimentatore IP20 24V DC 20W DALI
LED driver IP20 24V DC 20W DALI



AC142
Chiave per Vite Antivandalo
vandal-proof screw key



AC141
Coppia viti Antivandalo
Pair of vandal-Proof Screw



AC503
Cassaforma da incasso
Wall recessed rough-in housing

Vetro Bianco **V1** 
White Glass

Vetro Nero **V2** 
Black Glass


Acciaio inossidabile **15** 
Stainless Steel

Altre finiture disponibili sul sito web
Other finishes available on the website 

LongPasso




Vai alla pagina
Web del prodotto
Go to the product Web page

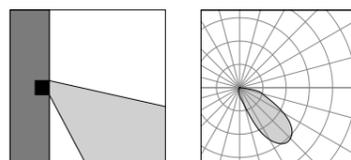

- Vetro Bianco V1 
White Glass
 - Vetro Nero V2 
Black Glass
 - Acciaio inossidabile 15 
Stainless Steel
- Altre finiture disponibili sul sito web
Other finishes available on the website 

4W / 5,8W LED BLU / 3000K / 4000K
204lm - 778lm
asymmetrical
24 V DC / 110-240 V - 50/60 Hz
alimentatore incluso LED driver integral
dimmerabile in base al driver utilizzato
dimmmable based on driver used

GH1605



ACCESSORI ACCESSORIES



AC088.0024040FN-67
LED driver IP67 24V DC 40W
LED driver IP67 24V DC 40W

AC146.0024014FN-67
LED driver IP67 24V DC 14W
LED driver IP67 24V DC 14W

AC184.0024016SN-20
Alimentatore IP20 24V DC 16W
LED driver IP20 24V DC 16W

AC042.0024020SD-20
Alimentatore IP20 24V DC 20W DALI
LED driver IP20 24V DC 20W DALI




AC004
Cassaforma da incasso
Wall recessed rough-in housing

LongPasso Spring



4W / 5,8W LED BLU / 3000K / 4000K
 204lm - 778lm
 asymmetrical
 24 V DC / 110-240 V - 50/60 Hz
 alimentatore incluso *control gear not included*
 dimmerabile in base al driver utilizzato
dimmmable based on driver used

GH1603



ACCESSORI ACCESSORIES



AC088.0024040FN-67
 LED driver IP67 24V DC 40W
LED driver IP67 24V DC 40W

AC146.0024014FN-67
 LED driver IP67 24V DC 14W
LED driver IP67 24V DC 14W

AC184.0024016SN-20
 Alimentatore IP20 24V DC 16W
LED driver IP20 24V DC 16W

AC042.0024020SD-20
 Alimentatore IP20 24V DC 20W DALI
LED driver IP20 24V DC 20W DALI

Vetro Bianco **V1** 
White Glass

Vetro Nero **V2** 
Black Glass

Acciaio inossidabile **15** 
Stainless Steel


Altre finiture disponibili sul sito web
Other finishes available on the website 

LongPasso Screw



4W / 5,8W LED BLU / 3000K / 4000K
 204lm - 778lm
 asymmetrical
 24 V DC / 110-240 V - 50/60 Hz
 alimentatore incluso *LED driver integral*
 dimmerabile in base al driver utilizzato
dimmmable based on driver used

GH1602



ACCESSORI ACCESSORIES



AC088.0024040FN-67
 LED driver IP67 24V DC 40W
LED driver IP67 24V DC 40W

AC146.0024014FN-67
 LED driver IP67 24V DC 14W
LED driver IP67 24V DC 14W

AC184.0024016SN-20
 Alimentatore IP20 24V DC 16W
LED driver IP20 24V DC 16W

AC042.0024020SD-20
 Alimentatore IP20 24V DC 20W DALI
LED driver IP20 24V DC 20W DALI



AC142
 Chiave per Vite Antivandalo
vandal-proof screw key



AC141
 Coppia viti Antivandalo
Pair of vandal-Proof Screw



AC004
 Cassafornia da incasso
Wall recessed rough-in housing

Vetro Bianco **V1** 
White Glass

Vetro Nero **V2** 
Black Glass

Acciaio inossidabile **15** 
Stainless Steel

Altre finiture disponibili sul sito web
Other finishes available on the website 